



Rheem Marathon® non-metallic electric water heaters are durable, lightweight, and warranted not to leak as long as you own your home*

Non-metallic Tank Features

- Seamless, blow-molded, polybutene tank – impervious to rust and corrosion
- Multiple layers of filament wound fiberglass give the tank unmatched strength
- Polyurethane insulation helps reduce energy consumption
- Recessed brass drain valve is out of the way of brooms and scrubbers
- Durable PEX dip tube
- Tough molded polyethylene outer shell resists dents, scratches, and salt air

Efficiency

- .88 - .92 UEF
- Well insulated for reduced standby-heat loss
- Pipe wrap energy saving kit included- to achieve maximum energy savings

Performance

- FHR: 37 - 83 gallons, depending on model
- Recovery: up to 21 GPH at a 90° F rise

Easy Installation & Service

- Marathon's lightweight tank is easier to maneuver and position
- Bowl shaped tank bottom allows complete sediment draining
- Water tight grommets keep out overhead moisture and condensation

Plus...

- Thermally fused upper element provides protection against dry-firing
- Titanium lower element for superior resistance to lime build-up
- Brass drain valve
- Temperature and pressure relief valve
- Low Lead compliant
- Standard replacement parts



Marathon

85-Gallon Capacities
240 Volt AC/Single Phase
Electric



See specifications chart on back.





Marathon[®] Specifications

DESCRIPTION			FEATURES		ROUGHING IN DIMENSIONS (SHOWN IN INCHES)				ENERGY INFO.
TYPE	NOMINAL GALLON CAPACITY	RATED GALLON CAPACITY	FIRST HOUR RATING (GALLONS)	RECOVERY IN G.P.H. 90° F RISE	TANK HEIGHT A	HEIGHT TO WATER CONN. B	DIAMETER C	APPROX. SHIP WT. (LBS.)	UNIFORM ENERGY FACTOR (UEF)
Tall	85	84	77	21	66-1/4	70-1/4	28-1/4	134	0.92


Uniform Energy Factor and rated gallon capacity based on Department of Energy (DOE) requirements.

* This water heater is intended only for use as part of an electric thermal storage or demand response program. This water heater will not provide adequate hot water unless enrolled in such a program and is activated by your utility company or another program operator. Please confirm the availability of such a program in your local area before purchasing or installing this product.

Water heaters furnished with standard 240 or 120 volt AC, single phase non-simultaneous wiring. If heating elements of different wattages than those shown are demanded, they must be specifically requested. For height to top of T&P and heat traps add 3-1/2" to the height to water connection. Maximum test pressure: 300 PSI. Maximum working pressure: 150 PSI.

** Recovery calculations used are based on 4500 watt elements used in non-simultaneous operation.

**Recovery = wattage/2.42 x temp. rise °F.
 Example: $\frac{3000W}{2.42 \times 90^\circ} = 14 \text{ GPH}$

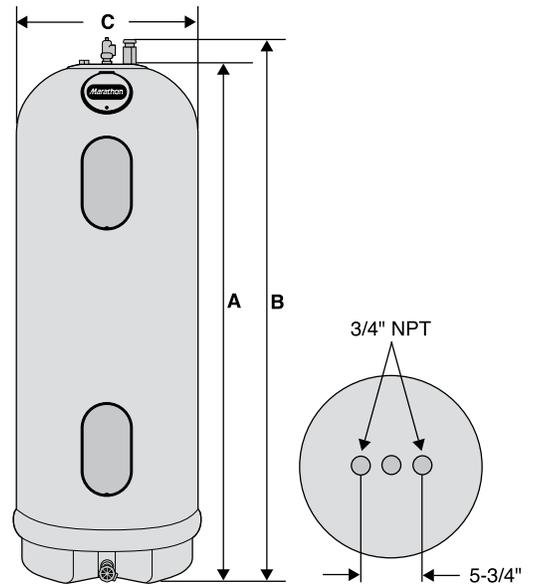

In keeping with its policy of continuous progress and product improvement, Rheem reserves the right to make changes without notice.

RMEA Manufacturing LLC | Onyx 2, Level P3, Offices 301 - 304

