



The new degree of comfort.™

Heavy Duty Electric commercial water heaters are available in 50 through 175 gallon capacities.

Features & Benefits

- Ideal for general commercial use and point-of-use applications like eyewash stations, or used as a booster
- Inputs: 3 through 108 kW
- Voltages: 208, 240, 400, 415 or 480 VAC in either single phase or 3-phase; 277 VAC single phase
- Element wattages: 2000, 3000, 4000, 4500, 5000 and 6000 in the four voltages; 9000 watt element at 480 VAC
- Choose 1, 3, 6, 9 or 12 element models for your specific application
- Elements are Lifeguard™ stainless steel, screw-in type that resist burn out and corrosion
- ASME construction is available on 50, 85 and 120 gallon models and comes standard on 175 model
- Two anode rods are installed to ensure long life and corrosion resistance

Efficiency

- 98% thermal efficiency
- Thick foam insulation for minimal standby heat loss

Performance

- Recovery rate: Up to 438 gallons GPH at a 100 degree rise
- 190° F maximum delivered

Capacity & Shipping Weight

- 50 Gal/270 lbs./320 lbs. ASME
- 85 Gal/350 lbs./380 lbs. ASME
- 120 Gal/430 lbs./460 lbs. ASME
- 175 Gal/700 lbs. ASME only

Easy Installation & Service

- Control box is located at the front of unit for easy wiring during installation
- Multiple knockout holes accommodate a variety of conduit sizes
- **Exclusive!** System Sentinel™ provides a diagnostic panel with LEDs that correspond to the number, location and status of each element
- **Exclusive!** Full-port, full-flow, brass drain valve for faster draining
- Minimum distance to combustible is zero inches from jacket and 18 inches from access door
- All models approved for installation on combustible flooring

Plus...

- Temperature and pressure relief valve at top of 175 gallon model and side on all other models
- Water connections: hot and cold water inlets are 2-1/2" NPT dielectric nipples on the 175 gallon model and 1-1/2" on all other models



Rheem Heavy Duty 50, 85, 120 & 175-Gallon Capacities





The new degree of comfort.™

Heavy Duty Electric Commercial Water Heaters

ELECTRICAL CHARACTERISTICS																		
INPUT KW	NO. OF ELEMENTS	ELEM- ENT WAT- TAGE	FULL LOAD CURRENT IN AMPERES									SURFACE MOUNTED			IMMERSION THERMOSTATS			
			208V		240V		277V		400V		480V		NO. OF T'STATS	NUMBER OF FUSES	NUMBER OF CONTACTORS	NUMBER OF FUSES	STAGED T'STATS	
			PHASE 1	PHASE 3	PHASE 1	PHASE 3	PHASE 1	PHASE 3	PHASE 1	PHASE 3	PHASE 1	PHASE 3				NO. OF T'STATS	KW STEP SIZE	
3	1	3000	15	-	13	-	11	7.5	4.3	-	6	-	-	-	2	N/A ONE T'STAT STD.	3	
6	3	2000	29	17	25	14	22	15	8.7	13	7	1	6	2	6		6	
9	3	3000	43	25	38	22	33	22.5	13	19	11	1	6	2	6		9	
12	3	4000	58	33	50	29	43	30	17.3	25	15	1	6	2	6		12	
15	3	5000	72	42	63	36	54	37.5	21.7	31	18	1	6	2	6		15	
18	3	6000	-	-	75	43	65	45	26	38	22	1	6	2	6		18	
18	6	3000	87	50	-	-	-	-	-	-	-	1	12	4	12	2	9	
24	6	4000	116	67	100	58	87	60	34.6	50	29	1	12	4	12	2	12	
27	6	4500	130	75	113	65	98	67.5	39	56	33	1	12	4	12	2	13.5	
30	6	5000	144	84	125	73	108	75	43.3	63	36	1	12	4	12	2	15	
36	6	6000	-	-	150	87	130	90	52	75	43	1	12	4	12	2	18	
36	9	4000	173	100	-	-	-	-	-	-	-	1	18	6	18	3	12	
45	9	5000	217	125	188	109	163	112.5	65	94	54	1	18	6	18	3	15	
54	9	6000	260	150	225	130	195	135	77.9	113	65	1	18	6	18	3	18	
60	12	5000	288	166	250	144	217	150	86.6	125	72	-	-	-	24	4	15	
72	12	6000	-	200	-	172	260	180	103.9	150	87	-	-	-	24	4	18	
81	9	9000	-	-	-	-	-	202.5	116.9	169	98	-	-	-	18	3	27	
108	12	9000	-	-	-	-	-	270	155.9	-	130	-	-	-	24	4	27	

Thermostat Staging – On all immersion thermostat models, 24 kW and above (18 kW for 208V), additional thermostats can be provided so that the maximum element input will not exceed 18 kW - 27 kW per step. Temperature differential between steps can be set as desired.

Note: Thermostat staging recommended on 81 and 108 kW models.

RECOVERY CAPACITIES Recovery in U.S. Gallons/Hr. (GPH) and Liters/Hr. (LPH) at Various Temperature Rises																	
INPUT KW	EQUIVALENT BTU/HR.	UNITS	40°F (22°C)	50°F (28°C)	60°F (33°C)	70°F (39°C)	80°F (45°C)	90°F (50°C)	100°F (56°C)	110°F (61°C)	120°F (67°C)	130°F (72°C)	140°F (78°C)				
3	10,236	GPH	31	25	20	17	15	14	12	11	10	9	9				
		LPH	117	95	76	64	57	53	45	42	38	34	34				
6	20,473	GPH	62	50	41	35	31	28	25	23	21	19	18				
		LPH	235	188	157	134	117	104	94	85	78	72	67				
9	30,709	GPH	93	74	62	53	47	41	37	34	31	29	27				
		LPH	352	282	235	201	176	157	141	128	117	108	101				
12	40,946	GPH	124	99	83	71	62	55	50	45	41	38	35				
		LPH	470	376	313	268	235	209	188	171	157	145	134				
15	51,183	GPH	155	124	103	89	78	69	62	56	52	48	44				
		LPH	587	470	391	335	294	261	235	213	196	181	168				
18	61,420	GPH	186	149	124	106	93	83	74	68	62	57	53				
		LPH	705	564	470	403	352	313	282	256	235	217	201				
24	81,893	GPH	248	199	165	142	124	110	99	90	83	76	71				
		LPH	939	751	626	537	470	417	376	342	313	289	268				
27	92,129	GPH	279	223	186	160	140	124	112	102	93	86	80				
		LPH	1057	845	705	604	528	470	423	384	352	325	302				
30	102,366	GPH	310	248	207	177	155	138	124	113	103	95	89				
		LPH	1174	939	783	671	587	522	470	427	391	361	335				
36	122,839	GPH	372	298	248	213	186	165	149	135	124	115	106				
		LPH	1409	1127	939	805	705	626	564	512	470	434	403				
45	153,549	GPH	465	372	310	266	233	207	186	169	155	143	133				
		LPH	1761	1409	1174	1006	881	783	705	640	587	542	503				
54	184,259	GPH	558	447	372	319	279	248	223	203	186	172	160				
		LPH	2114	1691	1409	1208	1057	939	845	769	705	650	604				
60	204,723	GPH	620	496	414	354	310	276	248	226	206	190	178				
		LPH	2347	1878	1567	1340	1173	1045	939	856	780	719	674				
72	245,678	GPH	744	596	296	426	372	330	298	270	248	230	212				
		LPH	2816	2256	1120	1615	1408	1249	1128	1022	939	871	803				
81	276,388	GPH	838	670	558	479	419	372	335	305	279	258	239				
		LPH	3174	2540	2116	1814	1587	1410	1270	1154	1058	977	907				
108	368,518	GPH	1094	875	730	625	547	486	438	398	365	337	313				
		LPH	4141	3312	2763	2366	2071	1840	1658	1507	1382	1276	1185				

In keeping with its policy of continuous progress and product improvement, Rheem reserves the right to make changes without notice.



The new degree of comfort.™

Heavy Duty Electric Commercial Water Heaters

WATER TEMPERATURE RATINGS

MODEL NUMBER	TANK CAPACITY		THERMOSTAT TYPE	MINIMUM DELIVERED TEMPERATURE	MAXIMUM DELIVERED TEMPERATURE	HIGH TEMPERATURE LIMIT
	GALLONS	LITERS				
ES50(A)	50	189	Surface	90°F	160°F	180°F
				32.2°C	71.1°C	82.2°C
ES85(A)	85	322	Surface	120°F	160°F	190°F
				48.8°C	71.1°C	87.8°C
ES120(A)	119.9	454	Surface	120°F	160°F	190°F
				48.8°C	71.1°C	87.8°C
E50(A)	50	189	Immersion	90°F	190°F	200°F
				32.2°C	87.8°C	93.3°C
E85(A)	85	322	Immersion	90°F	190°F	200°F
				32.2°C	87.8°C	93.3°C
E120(A)	119.9	454	Immersion	90°F	190°F	200°F
				32.2°C	87.8°C	93.3°C
E175A	175	662	Immersion	90°F	190°F	200°F
				32.2°C	87.8°C	93.3°C

MODEL NUMBERS

INPUT KW	SURFACE MOUNTED THERMOSTATS			IMMERSION THERMOSTATS			
	TANK CAPACITY IN GALLONS			TANK CAPACITY IN GALLONS			
	50	85	120	50	85	120	175
3	N/A	N/A	N/A	N/A	N/A	N/A	E175A-3-G
6	ES50-6-G	ES85-6-G	ES120-6-G	E50-6-G	E85-6-G	E120-6-G	E175A-6-G
9	ES50-9-G	ES85-9-G	ES120-9-G	E50-9-G	E85-9-G	E120-9-G	E175A-9-G
12	ES50-12-G	ES85-12-G	ES120-12-G	E50-12-G	E85-12-G	E120-12-G	E175A-12-G
15	ES50-15-G	ES85-15-G	ES120-15-G	E50-15-G	E85-15-G	E120-15-G	E175A-15-G
18	ES50-18-G	ES85-18-G	ES120-18-G	E50-18-G	E85-18-G	E120-18-G	E175A-18-G
24	ES50-24-G	ES85-24-G	ES120-24-G	E50-24-G	E85-24-G	E120-24-G	E175A-24-G
27	ES50-27-G	ES85-27-G	ES120-27-G	E50-27-G	E85-27-G	E120-27-G	E175A-27-G
30	ES50-30-G	ES85-30-G	ES120-30-G	E50-30-G	E85-30-G	E120-30-G	E175A-30-G
36	ES50-36-G	ES85-36-G	ES120-36-G	E50-36-G	E85-36-G	E120-36-G	E175A-36-G
45	ES50-45-G	ES85-45-G	ES120-45-G	E50-45-G	E85-45-G	E120-45-G	E175A-45-G
54	ES50-54-G	ES85-54-G	ES120-54-G	E50-54-G	E85-54-G	E120-54-G	E175A-54-G
60	N/A	N/A	N/A	N/A	N/A	N/A	E175A-60-G
72	N/A	N/A	N/A	N/A	N/A	N/A	E175A-72-G
81	N/A	N/A	N/A	N/A	E85A-81-GS	E120A-81-GS	E175A-81-G
108	N/A	N/A	N/A	N/A	N/A	N/A	E175A-108-G

Fuse type - "G" in the model number represents Class G fuses.

Thermostat staging - E models (Immersion thermostat) 24 kW and above (18 kW for 208V), may be ordered with additional thermostat(s) for staging. Add "S" after fuse type designation. Recommended on 81 and 108 kW models.

Example: E175A-81-G becomes E175A-81-GS.

ASME Construction - E models (Immersion Thermostat) may be ordered with ASME certified construction. Add "A" after capacity designation. Example: E85-36-G becomes E85A-36-G.

UL Sanitation Compliance - all models except E175A are UL Sanitation (NSF5) compliant when equipped with the optional ring seal kits. E(S)50 - AS38355, E(S)85 - AS38356, E(S)120 - AS38357.

Solid State Low Water Cut-off - E models (Immersion Thermostat) may be ordered with probe type cut-off for field installation (AP8408).

Integral Fusing - all models have integral fusing for each element.

Anode Rods - two (2) magnesium anodes installed in each tank to ensure long life and corrosion resistance.

Temperature and Pressure Relief Valve - CSA/ASME rated and factory installed.

Electrical Connections - pre-wired, accessible control box with multiple knock-outs on side in size selections to match the National Electric Code. Sizes range from 1/2" to 2-1/2". A grounding screw is provided for attaching an equipment grounding conductor.

Terminal Block - all models are equipped with U.L. listed terminal blocks for simplicity of installation. The terminal block will accept either copper or aluminum field connect wire.

120 Volt Control Circuit - all units are furnished with a fused 120 volt control circuit. All controls (thermostats, high temperature limit, etc.) are operated off of this basic 120 volt control circuit. This circuit is created by an internal multi-tap transformer of unique design that has four (4) taps for the primary voltages, 208, 240, 277 and 480.


Water Connections - hot outlet and cold inlet for the 50-120 gallon capacity models are 1-1/2" (175 gallon models are 2-1/2") NPT dielectric nipples which prevent excessive turbulence of heated water and results in optimum tank draw.

In keeping with its policy of continuous progress and product improvement, Rheem reserves the right to make changes without notice.



DIMENSIONAL INFORMATION All dimensions shown in English and Metric

MODEL NUMBER	UNITS	A	B	C	D	E	APPROX. SHIPPING WEIGHT (LBS.) STD. ASME
E(S)50(A)	inches	43-5/8	26-1/4	36-1/4	32	19	270 lbs. 320 lbs.
	mm	1108	667	920	813	483	122 kgs. 145 kgs.
E(S)85(A)	inches	57-11/16	28-1/4	49-1/2	34	20	350 lbs. 380 lbs.
	mm	1465	718	1258	864	508	159 kgs. 172 kgs.
E(S)120(A)	inches	67-5/8	30-1/4	58-3/4	36	21	430 lbs. 460 lbs.
	mm	1718	768	1493	914	533	185 kgs. 209 kgs.
E175A	inches	69-1/2	32-1/4	72-1/2	38-1/2	22-1/4	— 700 lbs.
	mm	1765	832	1842	826	565	— 318 kgs.

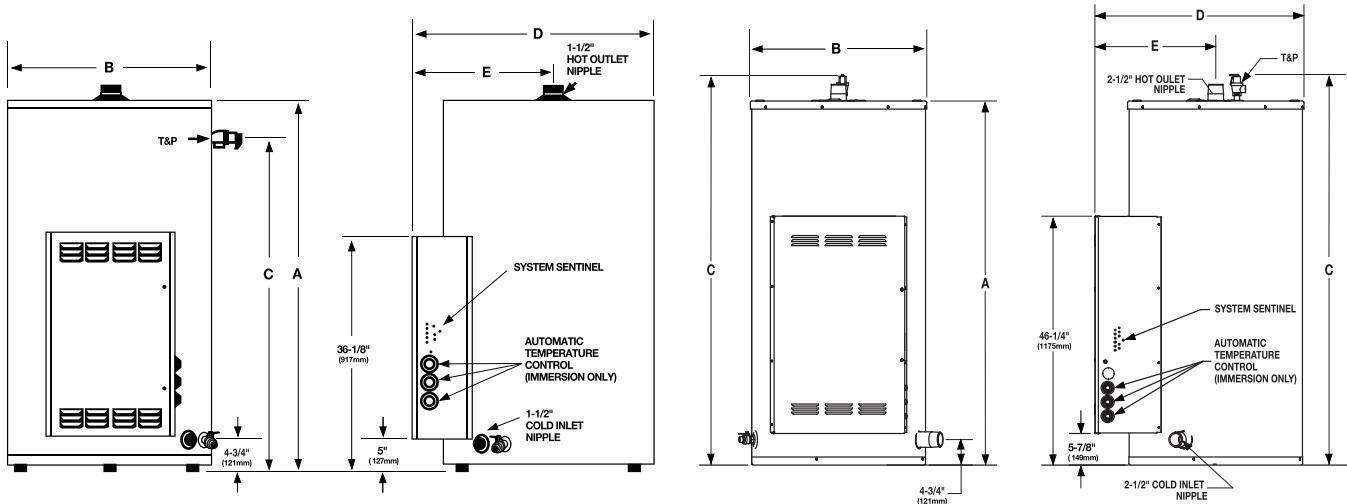

50, 85 and 120 Gallon Models

175 Gallon Model

Recommended Specifications (for trade reference only)

Water heater(s) shall be model _____, manufactured by Rheem-Ruud, having electrical input of _____ kW and a recovery rate of _____ GPH at a 100°F temperature rise. Water heater(s) shall have a storage capacity of _____ gallons. Water heater(s) shall have the UL seal of certification and be factory equipped with an CSNASME rated temperature and pressure relief valve. Tank(s) shall have a double coating of high temperature porcelain enamel and furnished with magnesium anode rods rigidly supported. Water heater(s) shall meet or exceed the standby loss requirements of ASHRAE. Tank(s) shall have a working pressure of 150 psi, and shall be completely assembled. Water heater(s) shall be approved-listed and constructed in accordance with UL Sanitation (NSF5). Water heater(s) shall be equipped with stainless steel "screw-in" type elements. Tank shall be insulated with thick polyurethane foam insulation. Water heater(s) shall be constructed

with a System Sentinel element diagnostic panel utilizing light emitting diodes. Each LED will correspond to the number and location of the heating elements and monitor their on-off function. Water heater(s) shall be provided with internal power circuit fusing, control circuit fusing, magnetic contactors, 120 volt control circuit transformer and surface mounted thermostat or immersion thermostat(s) with manual reset high limit control. 1-1/2" inlet and outlet water connections for 80 through 120 gallon models and 2-1/2" for 175 gallon units shall be provided. Water heater(s) shall be covered by a three year limited warranty against tank leaks.

In keeping with its policy of continuous progress and product improvement, Rheem reserves the right to make changes without notice.