



engineered for life™



R32.

Wall Mount Inverter Series

For 50 Hz: UAE, Oman, Bahrain and Iraq



In everything we do, we integrate
sustainability.



R32 Wall Mount Inverter Series



2035 goals

30%
 GHG REDUCTION
 Reduce emissions intensity by 30% throughout the entire lifecycle of Rheem products²

SUSTAINABLE
 PACKAGING
 Achieve an average of 90% reusable, recyclable, or compostable packaging OR at least 50% recycled content in product packaging³

10%
 WASTE REDUCTION
 Reduce global waste intensity (ton/unit) by 10%⁵

ZERO
 WASTE TO LANDFILL
 Maintain zero waste to landfill (ZWTL) at all factories and on-board new acquisitions⁴

1M+
 TRAININGS
 Complete 1 million trainings for plumbers, contractors, and key influencers globally on sustainable products, refrigerant management and / or sustainable best practices

Working Toward A Greater Degree™

Building upon the strong foundation set in 2019, our next generation of sustainability takes the familiarity of the original framework and simplifies it into Products, Process and People. These pillars provide a north star, helping us focus on innovating products with higher efficiency, manufacturing them in a process that reduces our direct use of resources, and supporting the people that recommend and install in homes and business around the globe.

1. Rheem's goal is to reduce greenhouse gas emissions by 30% by 2035 from a 2023 baseline. This metric will be based on intensity emissions normalized by revenue and includes Scopes 1-3 as defined by the Greenhouse Gas Protocol. At this time, these figures have not been independently verified by a third party.
2. Rheem measures reusable, recyclable, compostable, and recycled content in line with ISO and FTC standards. At this time, these figures have not been independently verified by a third party.
3. A Rheem plant is considered to have reached Zero Waste to Landfill when it achieves a rate of at least 90% diversion of nonhazardous solid waste away from landfill, waste-to-energy (WTE), and incineration, in line with the Zero Waste International Alliance standards and TRUE Zero Waste standards. At this time, these figures have not been independently verified by a third party.
4. Rheem measures waste intensity as a ratio of total weight of non-hazardous waste generated across all manufacturing facilities to total units produced from a 2023 baseline. At this time, these figures have not been independently verified by a third party.



engineered for life™

R32




Smart Cooling Powered by R32


This air conditioner uses R32 refrigerant, a modern cooling gas that's more efficient and kinder to the environment. R32 helps your home cool faster while using less energy, and it produces fewer emissions than older refrigerants. It's an important step toward cleaner, more sustainable comfort for you and your family.

Nomenclature.


System Model Name

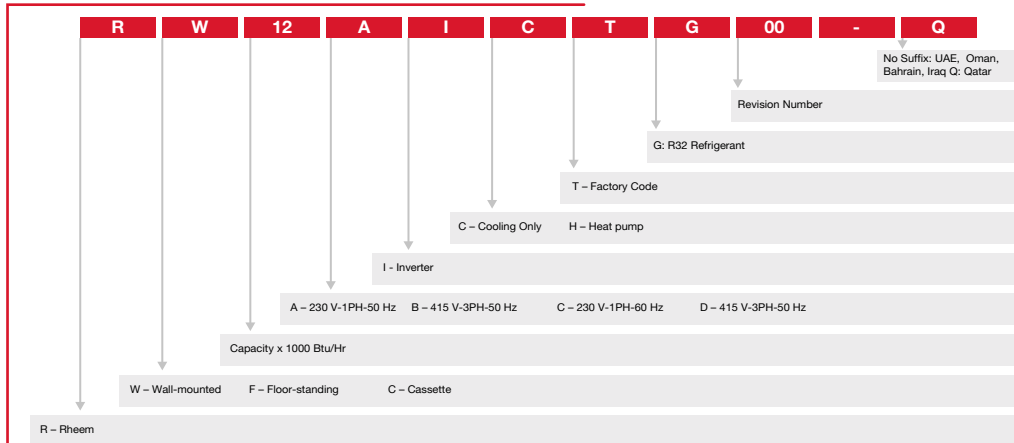

Indoor Model Name

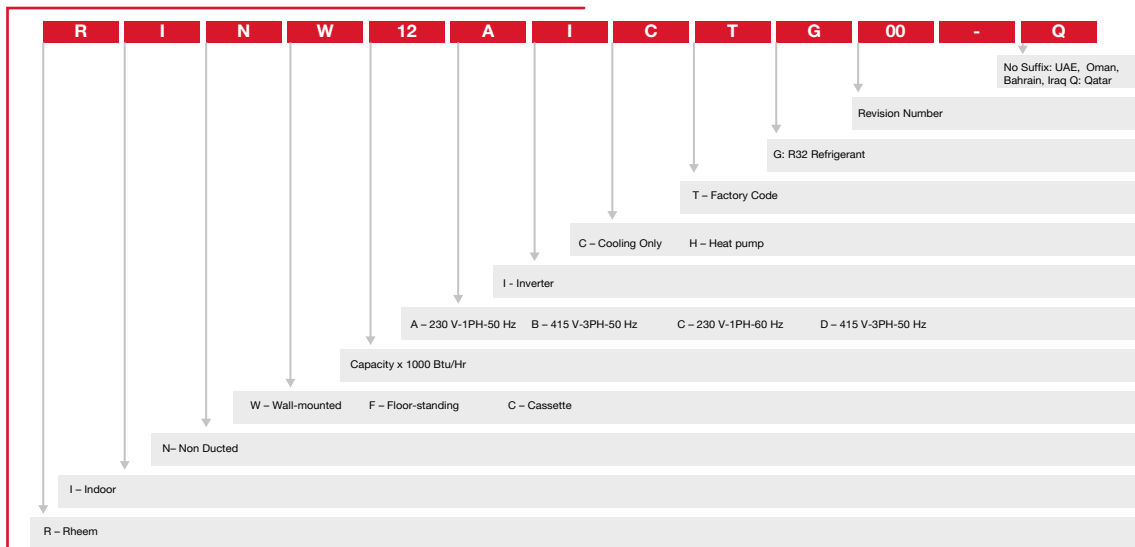

Outdoor Model Name

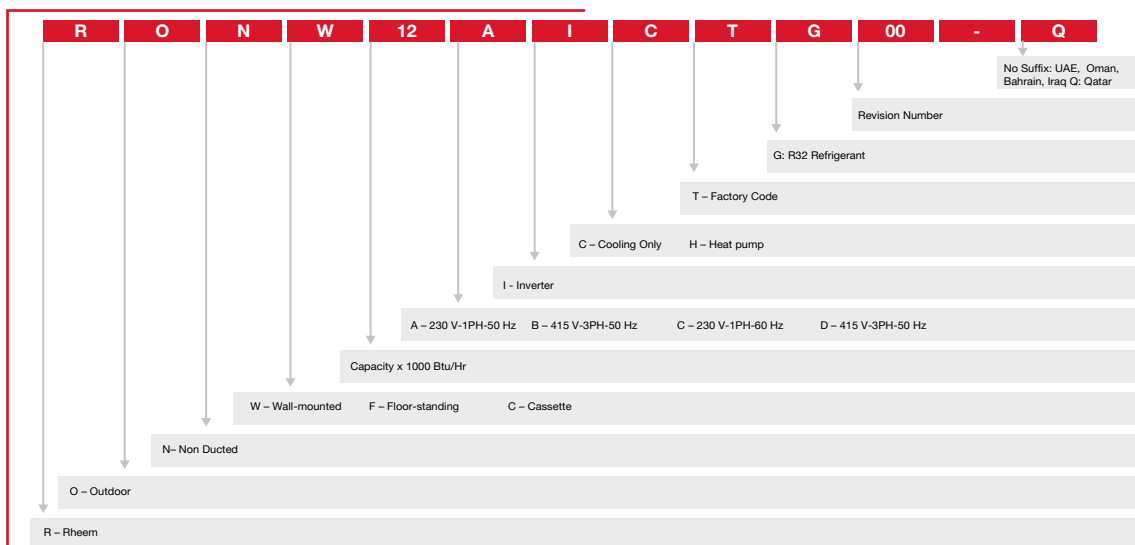

Split Air-Conditioner Panels.



RW12AICTG00/RW12AIHTG00

RW18AICTG00/RW18AIHTG00

RW24AICTG00/RW24AIHTG00

RW30AICTG00/RW30AIHTG00




RW36AICTG00/RW36AIHTG00

Features



Dual Drainage



Louver Position Memory



Self-diagnosis



Low Noise



Rust Proof



engineered for life™

Features.



**High Efficiency DC
Inverter T3 Compressor**



**High Ambient
Operation Up to 60°C**




**Less Refrigerant
Charge Requirement**



**Auto
Dust Removal**

Rapid Cooling and Heating.

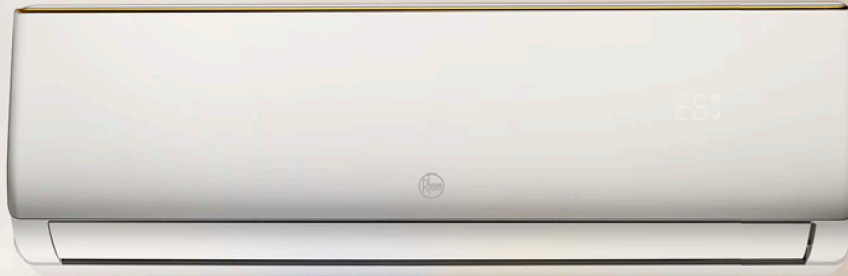

Cool Wind Blowing Out



18°C




30s

In Cooling Mode

Outlet Temperature Decreased Rapidly in 30"

Hot Wind Blowing Out

*Heat pump models only



40°C



60s

In Heating Mode

Outlet Temperature Increased Rapidly in 60"



56°C High Temperature Self-cleaning & Sterilization

The indoor unit cleans itself automatically, with frosting, quick defrosting, high-temperature drying, and 56°C sterilization, ensuring cleaner air and a healthier breathing environment.




Frosting



High Temperature Drying



Defrosting



56°C High Temperature Sterilization

* Heat Pump DC Inverter Only

Fan Defrosting



Frosting



Cleaned Evaporator



Fan Drying



Automatic Self Cleaning

The indoor unit cleans itself automatically by frosting, fan defrosting, and fan drying ensuring cleaner air and healthier breathing environment.

*Cooling Only DC Inverter Only

Unique Air-Cooled Technology.

Because of the negative pressure generated by the outdoor fan, the outdoor cooler air is flown through the PCB box via compressor cavity in order to cool down the electric parts of the outdoor unit allowing the unit to operate at ambient conditions up to 60C.




52°C
Strong Cooling



60°C
Nonstop Cooling

Capacity Comparison in High Ambient Temperature

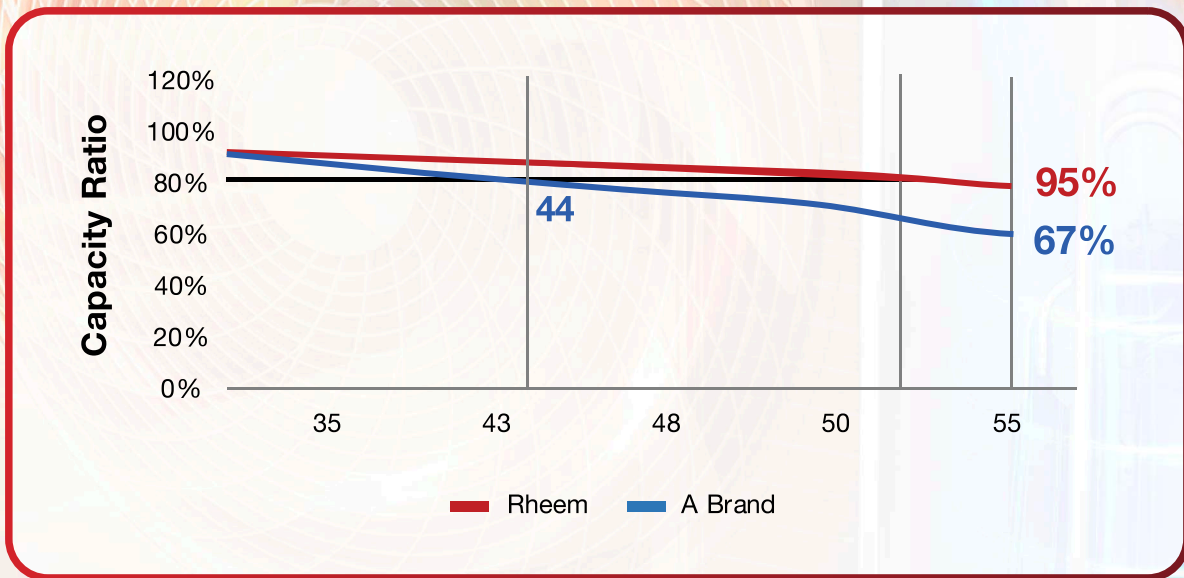


- Rheem model can keep full cooling capacity as rated in **52°C** , but A brand just in **44°C**
- In 55°C ambient, Rheem model can keep **95%** rated cooling capacity, but A brand just **67%**

(*Reference 18K model)




Vector Precision Air Supply

Various precise fixed angles of air supply can provide more comfortable choices for users.




3 Swing Types (Vertical)

- Whole-house swing
- - - Upside swing
- Downside swing




5 Blow Types (Vertical)

- - - Fix direction of air blow



4 Swing Types (Horizontal)

- Whole-house swing Side Swing (L-R) Middle Swing



5 Blow Types (Horizontal)

- - - Fix direction of air blow

Energy Saving Experience.

Full DC Inverter System

A DC inverter air-conditioner varies the compressor's rotation speed to precisely maintain the set temperature.





Fast Cooling

DC inverter air-conditioner enables the compressor to achieve maximum frequency in the shortest time from start up. It cools down 15% faster than conventional non-inverter



Precise Cooling

A DC inverter air-conditioner varies the compressor rotation speed to provide a precise method of maintaining the set temperature.

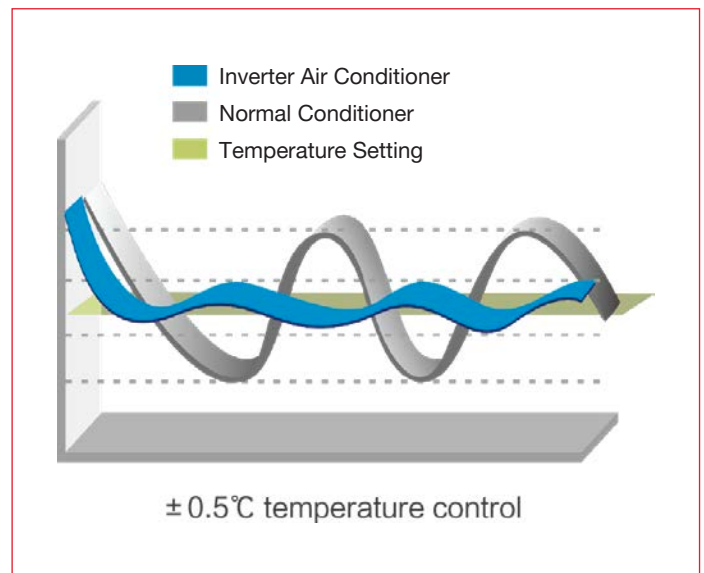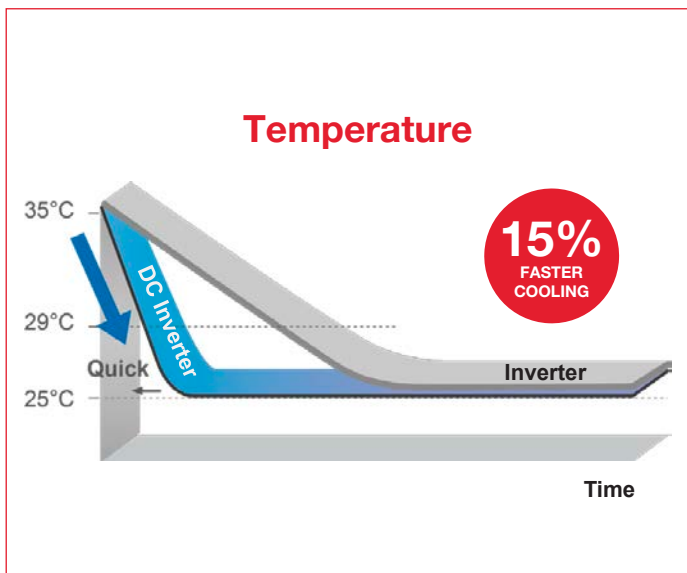



Other Features.




Smart Air Flow

In cooling mode, the cool air blows towards the ceiling to provide a shower-style cooling experience. In heating mode, the warm air is blowing towards the floor to provide a blanket-style heating experience.



WiFi Connectivity (Optional)

Enjoy effortless comfort with built-in Wi-Fi connectivity that lets you control your mini split air conditioner anytime, anywhere from your smartphone.



Low Noise Cooling & Heating

No more annoying sound from sudden speed changes and turning on/off of an air conditioner. Rheem's DC inverter unit ensures low noise operation at different conditions.




Better Safety Design


No connection between condensate water and electricity. BMC fireproof electric control box is applied, which creates high heat resistance & erosion resistance.

Condensing Unit Features.



Strong resistant metal plates of rust & corrosion, maintaining its excellent performance in difficult climate such as humid, coastal, etc.

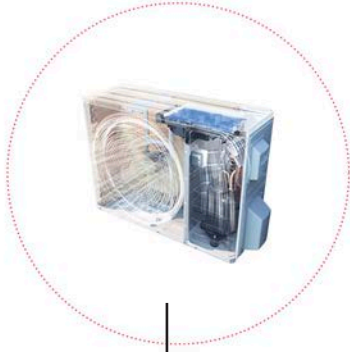


Inner **grooved cooper pipe** of more efficient heat exchanging.

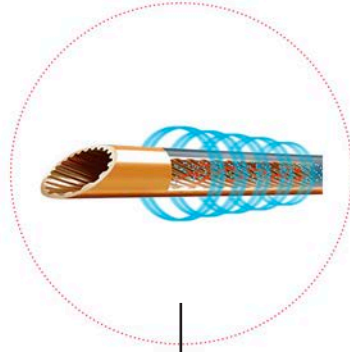


Coated PCB with strong anti-corrosion, anti-oxidation & anti-rust.

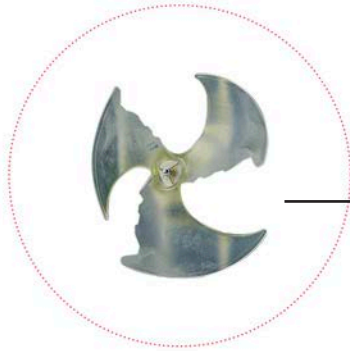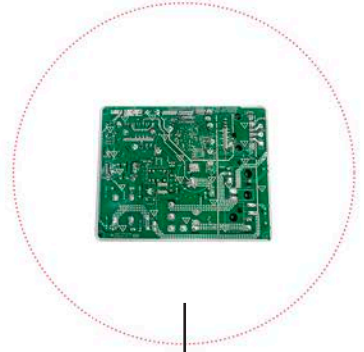

Bionic propeller fan with lower operation noise and higher air volume.

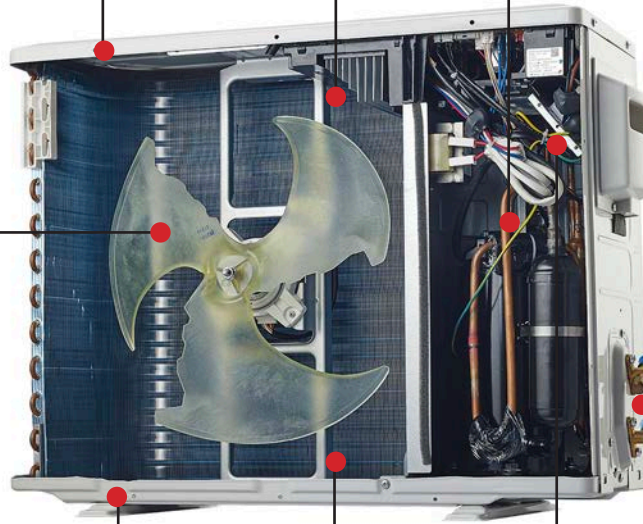

Tougher **valve protection** can provide better protection for the connection valves.

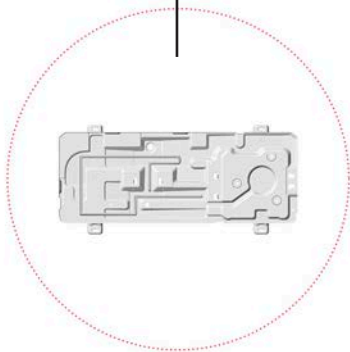

Heating belt is available for better anti-frosting in the bottom plate with optimized reinforcing rib layout.



Excellent **hydrophilia coated fins** with less accumulation of dust, bacteria, etc.




Flanging processed plate **metal – protecting wiring** from damage of sharp edge.





Remote Controller Features.

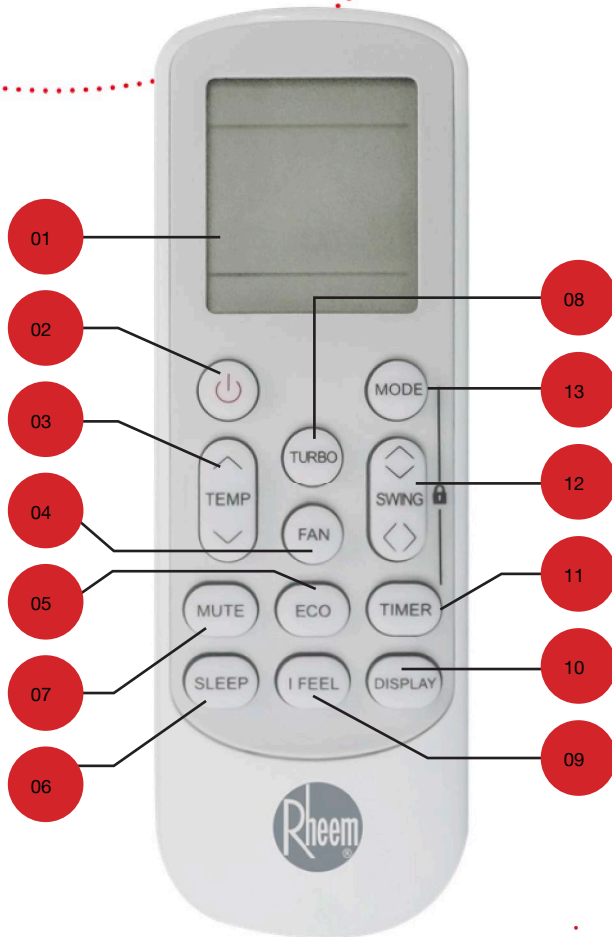

01	LED Display Screen
02	ON/OFF
03	Temperature Setting
04	Fan Speed Setting
05	Eco Mode
06	Sleep Mode
07	Mute Mode
08	Turbo
09	I Feel
10	LED Display (ON/OFF)
11	Timer Setting
12	Swing (Horizontal/Vertical)
13	Mode Setting (AUTO/COOL/ DRY/FAN/HEAT) *heat mode is for heat pump models only.

I FEEL

The in-built additional temperature sensor in the remote controller monitors the surrounding temperature. Therefore, the air-conditioner can adjust the room temperature more accurately and provide extra comfort to users.

ECO

By activating the ECO mode, the air conditioner will automatically work in the most efficient and energy saving way, while maintaining the most comfortable experience in the living room.

Features Summary.

Range	12K	18K	24K	30K	36K
Sleep	●	●	●	●	●
Clock (Real Time)	-	-	-	-	-
Timer ON/OFF	●	●	●	●	●
Vertical Swing (Motorized or Manual)	●	●	●	●	●
Horizontal Swing (Motorized or Manual)	●	●	●	●	●
Energy Saving	●	●	●	●	●
Air Flow Direction Control	●	●	●	●	●
Memory	●	●	●	●	●
Autorestart	●	●	●	●	●
IFeel	●	●	●	●	●
Turbo Cooling	●	●	●	●	●
Self Clean / Blow	●	●	●	●	-
Self Diagnosis (Error Code)	●	●	●	●	●
Remote LCD	●	●	●	●	●
Filter Configuration	●	●	●	●	●
Intelligent Defrost	-	-	-	-	-
Filter Dirty Alarm	●	●	●	●	●
Cold Plasma or Ioniser	○	○	○	○	○
Children Lock	●	●	●	●	●
Evaporator Fins	Golden	Golden	Golden	Golden	Golden
Condenser Fins	Golden	Golden	Golden	Golden	Golden
Max Piping Capability Total (Meter)	25	30	30	30	30
Max Piping Capability Vertical (Meter)	15	20	20	20	20

● Standard ○ Optional - N/A



R32 Cool Only Inverter Specifications

Capacity Class			12K	18K	24K	30K	36K
Type			Cooling Only	Cooling Only	Cooling Only	Cooling Only	Cooling Only
			Inverter with R32	Inverter with R32	Inverter with R32	Inverter with R32	Inverter with R32
System Model Number			RW12AICTG00	RW18AICTG00	RW24AICTG00	RW30AICTG00	RW36AICTG00
Indoor Model Name			RINW12AICTG00	RINW18AICTG00	RINW24AICTG00	RINW30AICTG00	RINW36AICTG00
Outdoor Model Name			RONW12AICTG00	RONW18AICTG00	RONW24AICTG00	RONW30AICTG00	RONW36AICTG00
Rated cooling capacity(T1)	Btu/h		12500(2559~15354)	18600(4436~20131)	24500(3412~26272)	30000(5800~34120)	36000(5800~37532)
Rated cooling capacity(T1)	W		3664(750~4500)	5451(1300~5900)	7181(1000~7700)	8792(1700~10000)	10551(1700~11000)
Rated cooling capacity(T3)	Btu/h		12000(2559~12624)	17500(5118~18766)	22000(5118~23202)	25500(5800~30708)	32000(5800~32073)
Rated cooling capacity(T3)	W		3517(750~3700)	5129(1500~5500)	6506(1500~6800)	7474(1700~9000)	9379(1700~9400)
EER for cooling(T1)	Btu/h~W;		12.401	12.016	11.802	12.402	12.401
EER for cooling(T1)	W/W		3.63	3.52	3.46	3.63	3.63
EER for cooling(T3)	Btu/h~W;		9.600	9.011	9.013	9.202	9.012
EER for cooling(T3)	W/W		2.81	2.64	2.64	2.70	2.64
Moisture removal	Liters/h		1.2	1.8	2.2	2.8	3.3
Pressure	High(DP)	MPa	4.5	4.5	4.5	4.5	4.5
	Low(SP)	MPa	1.9	1.9	1.9	1.9	1.9
Indoor noise level at cooling	Super	dB(A)	46	49	50	55	55
	High	dB(A)	43	46	48	53	53
	Med.	dB(A)	37	41	42	47	47
	Low	dB(A)	32	36	37	42	38
	Quite	dB(A)	28	32	32	40	35
Outdoor noise level		dB(A)	53	56	59	61	60
Power supply			220-240V~1 Phase/50/60Hz	220-240V~1 Phase/50/60Hz	220-240V~1 Phase/50/60Hz	220-240V~1 Phase/50/60Hz	220-240V~1 Phase/50/60Hz
Voltage Range	V		198~264	198~264	198~264	198~264	198~264
Current	Cooling(T1)	A	6.6(1.1~9.0)	7.1(1.2~12.0)	9.5(1.5~15.0)	11.1(2.0~18.0)	13.3(2.0~19.0)
	Cooling(T3)	A	5.7(1.1~9.0)	8.9(1.2~12.0)	11.4(1.5~15.0)	12.7(2.0~18.0)	16.3(2.0~19.0)
Power input	Cooling(T1)	W	1008.000	1548.000	2076.000	2419.000	2903.000
	Cooling(T3)	W	1250.000	1942.000	2486.000	2771.000	3551.000
Refrigerant	kg		R32/0.49	R32/0.72	R32/0.82	R32/0.97	R32/1.07
Compressor	Compressor		Inverter	Inverter	Inverter	Inverter	Inverter
Expansion device			Capillary tube	Capillary tube	Capillary tube	EEV	EEV
Indoor airflow	m3/h		740/680/590/540/450/420/390	1000/940/860/780/720/660/550	1500/1410/1290/1180/1080/1000/820	1700/1600/1470/1330/1230/1130/930	1900/1750/1650/1540/1430/1320/1160
Connecting Pipe	Gas	Inches	Φ9(3/8")	Φ9(3/8")	Φ12(1/2")	Φ15.88(5/8")	Φ15.88(5/8")
	Liquid	Inches	Φ6(1/4")	Φ6(1/4")	Φ6(1/4")	Φ6(1/4")	Φ6(1/4")
Connecting Wiring	Size x Core number		4x1.0	4x1.5	4x0.75	4x0.75	4x0.75
Drainage Pipe			O.D 16mm	O.D 16mm	O.D 16mm	O.D 16mm	O.D 16mm
Net dimensions (W x D x H)	Indoor	mm	910×206×294	1010×220×315	1010×220×315	1191×258×360	1400×280×370
	Outdoor	mm	795×305×549	853×349×602	920×380×699	920×380×699	967×421×803
Net weight	Indoor	kg	9.0	11.0	11.5	16.0	21.0
	Outdoor	kg	22.0	29.5	37.5	39.0	43.5
Packaging dimensions (W x D x H)	Indoor	mm	979×277×372	1096×297×390	1096×297×390	1260×328×430	1495×385×465
	Outdoor (WOP)	mm	835×328×575	890×385×628	960×430×732	960×430×732	1022×480×835
	Outdoor (WP)	mm	835×340×585	890×385×628	960×430×732	960×430×732	1022×480×835
Gross weight	Indoor	kg	11.5	13.5	14.0	20.0	26.5
	Outdoor (WOP)	kg	24.0	32.5	41.5	43.0	48.5
	Outdoor (WP)	kg	25.0	33.5	42.5	44.5	50.5
Stuffing qty	40'HQ (WOP)	sets	250.0	195.0	150.0	126.0	82.0
	40'HQ (WP)	sets	245.0	195.0	150.0	126.0	82.0

R32 Heat Pump Inverter Specifications

Capacity Class			12K	18K	24K	30K	36K
Type			Heat pump	Heat pump	Heat pump	Heat pump	Heat pump
			Inverter with R32	Inverter with R32	Inverter with R32	Inverter with R32	Inverter with R32
System Model Number			RW12AIHTG00	RW18AIHTG00	RW24AIHTG00	RW30AIHTG00	RW36AIHTG00
Indoor Model Name			RINW12AIHTG00	RINW18AIHTG00	RINW24AIHTG00	RINW30AIHTG00	RINW36AIHTG00
Outdoor Model Name			RONW12AIHTG00	RONW18AIHTG00	RONW24AIHTG00	RONW30AIHTG00	RONW36AIHTG00
Rated cooling capacity(T1)	Btu/h		12100(2559~16036)	19100(4436~20472)	23000(5118~24566)	30000(9895~31390)	36500(7506~38214)
Rated cooling capacity(T1)	W		3546(750~4700)	5598(1300~6000)	6741(1500~7200)	8792(2900~9200)	10698(2200~11200)
Rated cooling capacity(T3)	Btu/h		11200(2559~13648)	17800(4436~19790)	20800(5118~24566)	26000(9895~29000)	32400(7506~38214)
Rated cooling capacity(T3)	W		3283(750~4000)	5217(1300~5800)	6096(1500~7200)	7620(2900~8500)	9496(2200~11200)
Rated heating capacity	W		3500(750~4600)	5250(1500~5900)	7100(1500~7600)	8500(2500~9200)	10500
EER for cooling(T1)	Btu/h~W;		12.449	12.403	12.406	12.402	12.402
EER for cooling(T1)	W/W		3.65	3.64	3.64	3.63	3.63
EER for cooling(T3)	Btu/h~W;		9.302	9.300	9.102	9.012	9.101
EER for cooling(T3)	W/W		2.73	2.73	2.67	2.64	2.67
COP for heating	W/W		3.80	3.60	3.30	3.8	3.60
Moisture removal	Liters/h		1.2	1.8	2.2	2.8	3.6
Pressure	High(DP)	MPa	4.5	4.5	4.5	4.5	4.5
	Low(SP)	MPa	1.9	1.9	1.9	1.9	1.9
Indoor noise level at cooling	Super	dB(A)	48	50	50	54	56
	High	dB(A)	46	48	48	51	53
	Med.	dB(A)	40	42	42	46	46
	Low	dB(A)	32	37	37	39	39
	Quite	dB(A)	30	32	33	37	36
Outdoor noise level	dB(A)		55	56	61	62	64
Power supply			220-240V~1 Phase/50/60Hz	220-240V~1 Phase/50/60Hz	220-240V~1 Phase/50/60Hz	220-240V~1 Phase/50/60Hz	220-240V~1 Phase/50/60Hz
Voltage Range	V		198~264	198~264	198~264	198~264	198~264
Current	Cooling(T1)	A	6.4(1.1~9.0)	7.0(1.2~12.0)	8.5(1.6~15.0)	11.1(3.5~17.0)	13.2(3.3~20.5)
	Cooling(T3)	A	5.5(1.1~9.0)	8.8(1.2~12.0)	10.6(1.6~15.0)	13.2(3.5~17.0)	16.0(3.3~20.5)
	Heating	A	6.0(1.2~9.0)	6.6(1.0~10.0)	9.7(1.6~12.0)	10.0(3.0~15.0)	13.2(2.2~19.0)
Power input	Cooling(T1)	W	972	1540	1854	2419	2943
	Cooling(T3)	W	1204	1914	2308	2885	3560
	Heating	W	921	1458	2151	2236	2916
Refrigerant	kg		R32/0.56	R32/0.75	R32/1.13	R32/1.36	R32/1.96
Compressor	Type		Rotary	Rotary	Rotary	Rotary	Rotary
Expansion device			Capillary tube	Capillary tube	EEV	EEV	EEV
Indoor airflow	m ³ /h		Cooling: 700/650/570/520/440/410/370 Heating: 385/420/505/605/650	Cooling:1000/940/860/780/720/660/550 Heating: 625/705/830/940/1000	Cooling:1500/1410/1290/1180/1080/1000/820 Heating: 1000/1130/1330/1500/1600	Cooling:1700/1560/1460/1310/1180/1080/1020 Heating: 1020/1080/1310/1560/1700	Cooling:1900/1750/1650/1540/1430/1320/1160 Heating: 1140/1210/1430/1620/1750
Connecting Pipe	Gas	Inches	Φ9(3/8")	Φ12(1/2")	Φ12(1/2")	Φ15.88(5/8")	Φ15.88(5/8")
	Liquid	Inches	Φ6(1/4")	Φ6(1/4")	Φ6(1/4")	Φ6(1/4")	Φ6(1/4")
Connecting Wiring	Size x Core number		4x1.0	4x1.5	4x0.75	4x0.75	4x0.75
Drainage Pipe			O.D 16mm	O.D 16mm	O.D 16mm	O.D 16mm	O.D 16mm
Net dimensions (W x D x H)	Indoor	mm	910×206×294	1010×220×315	1010×220×315	1191×258×360	1400×280×370
	Outdoor	mm	795×305×549	853×349×602	920×380×699	967×421×803	967×421×803
Net weight	Indoor	kg	9.0	11.0	11.5	16.0	23.0
	Outdoor	kg	23.0	30.0	39.5	46.0	50.5
Packaging dimensions (W x D x H)	Indoor	mm	979×277×372	1096×297×390	1096×297×390	1260×328×430	1495×385×465
	Outdoor (WOP)	mm	835×328×575	890×385×628	960×430×732	1022×480×835	1022×480×835
	Outdoor (WP)	mm	835×340×585	890×385×628	960×430×732	1022×480×835	1022×480×835
Gross weight	Indoor	kg	11.5	13.5	14.0	20.0	28.5
	Outdoor (WOP)	kg	25.0	33.0	43.5	51.0	55.5
	Outdoor (WP)	kg	26.0	34.0	44.5	52.5	57.5
Stuffing qty	40'HQ (WOP)	sets	250	195	150	105	82
	40'HQ (WP)	sets	245	195	150	105	82

Performance Tables (R32 Cool Only Inverter)

RW12AICTG00

Indoor Temperature						Outdoor Temperature								
AFR (CFM)	EWB (°C)	EDB (°C)	35°			40°			46°			52°		
			TC	SC	PI	TC	SC	PI	TC	SC	PI	TC	SC	PI
250	16	22	3.118	2.654	0.981	2.998	2.496	1.049	2.901	2.579	1.221	2.680	1.872	1.291
	17.2	22	3.142	2.631	0.984	3.033	2.529	1.052	2.922	2.623	1.224	2.693	1.886	1.292
	16	24.4	3.151	2.702	0.983	3.045	2.569	1.051	2.947	2.645	1.225	2.720	1.944	1.293
	17.2	24.4	3.162	2.715	0.984	3.100	2.645	1.060	2.980	2.689	1.234	2.800	1.986	1.294
	22	24.4	3.301	2.996	0.986	3.211	2.765	1.060	3.052	2.831	1.235	2.852	2.064	1.295
	16	27	3.356	3.034	0.987	3.269	2.934	1.061	3.129	2.890	1.236	2.875	2.124	1.295
	19	27	3.377	3.090	0.988	3.312	2.999	1.061	3.184	3.003	1.236	2.991	2.246	1.296
	22	27	3.383	3.094	0.990	3.317	2.997	1.062	3.188	3.006	1.240	2.997	2.253	1.297
	16	29	3.383	3.020	0.991	3.319	2.931	1.063	3.191	2.993	1.239	3.000	2.186	1.297
	19	29	3.389	3.048	0.992	3.324	2.954	1.063	3.195	3.011	1.236	3.002	2.204	1.297
	22	29	3.393	3.051	0.993	3.337	2.964	1.064	3.231	3.032	1.237	3.024	2.205	1.298
	16	22	3.349	2.797	0.996	3.279	2.858	1.067	3.178	2.996	1.114	2.974	2.018	1.305
310	17.2	22	3.360	2.815	0.996	3.290	2.878	1.067	3.192	3.012	1.117	2.984	2.028	1.306
	16	24.4	3.371	2.832	0.997	3.308	2.898	1.067	3.206	3.039	1.120	2.997	2.042	1.306
	17.2	24.4	3.384	2.852	0.997	3.319	2.921	1.068	3.215	3.064	1.120	3.009	2.055	1.307
	22	24.4	3.397	2.869	0.998	3.333	2.931	1.068	3.224	3.092	1.121	3.024	2.064	1.309
	16	27	3.408	2.845	0.998	3.341	2.957	1.068	3.234	3.039	1.127	3.040	2.076	1.310
	19	27	3.417	2.858	0.999	3.359	2.983	1.069	3.257	3.064	1.243	3.082	2.091	1.311
	22	27	3.451	2.880	0.999	3.391	3.001	1.070	3.287	3.092	1.244	3.086	2.167	1.312
	16	29	3.499	3.092	1.000	3.416	3.064	1.071	3.302	3.125	1.244	3.096	2.215	1.312
	19	29	3.510	3.253	1.000	3.449	3.157	1.070	3.315	3.183	1.245	3.114	2.360	1.314
	22	29	3.528	3.263	1.001	3.456	3.160	1.072	3.322	3.201	1.246	3.121	2.356	1.319
	16	22	3.397	2.962	1.004	3.348	2.884	1.079	3.241	3.092	1.252	3.080	2.148	1.328
	17.2	22	3.411	2.972	1.004	3.362	2.894	1.080	3.259	3.112	1.253	3.096	2.162	1.329
16	24.4	3.430	2.982	1.005	3.380	2.908	1.080	3.273	3.135	1.254	3.119	2.174	1.331	
17.2	24.4	3.467	3.009	1.006	3.396	2.929	1.081	3.289	3.147	1.253	3.144	2.201	1.330	
22	24.4	3.526	3.287	1.007	3.456	3.160	1.082	3.332	3.141	1.255	3.163	2.339	1.338	
16	27	3.594	3.352	1.007	3.510	3.220	1.084	3.371	3.155	1.255	3.190	2.324	1.340	
19	27	3.664	3.424	1.008	3.608	3.323	1.084	3.504	3.307	1.256	3.292	2.441	1.341	
22	27	3.673	3.433	1.011	3.616	3.330	1.086	3.510	3.316	1.259	3.297	2.445	1.342	
16	29	3.675	3.373	1.011	3.619	3.328	1.086	3.513	3.320	1.258	3.299	2.448	1.343	
19	29	3.677	3.377	1.010	3.622	3.328	1.087	3.517	3.409	1.250	3.304	2.399	1.334	
22	29	3.697	3.394	1.013	3.640	3.344	1.090	3.532	3.423	1.255	3.318	2.409	1.339	

RW12AIHTG00

Indoor Temperature						Outdoor Temperature								
AFR (CFM)	EWB (°C)	EDB (°C)	35°			40°			46°			52°		
			TC	SC	PI	TC	SC	PI	TC	SC	PI	TC	SC	PI
240	16	22	3.014	2.644	0.946	2.898	2.487	1.012	2.708	2.381	1.176	2.502	1.728	1.243
	17.2	22	3.037	2.621	0.949	2.932	2.520	1.015	2.728	2.421	1.179	2.514	1.741	1.244
	16	24.4	3.046	2.692	0.948	2.943	2.560	1.014	2.751	2.442	1.180	2.539	1.794	1.246
	17.2	24.4	3.056	2.706	0.949	2.997	2.635	1.022	2.782	2.483	1.189	2.614	1.833	1.246
	22	24.4	3.191	2.986	0.951	3.104	2.755	1.022	2.849	2.613	1.189	2.662	1.905	1.247
	16	27	3.244	3.023	0.952	3.160	2.924	1.023	2.921	2.668	1.190	2.684	1.960	1.248
	19	27	3.264	3.079	0.953	3.201	2.989	1.023	2.972	2.772	1.190	2.792	2.073	1.248
	22	27	3.270	3.083	0.955	3.206	2.987	1.024	2.976	2.775	1.194	2.798	2.080	1.249
	16	29	3.274	3.009	0.955	3.209	2.921	1.025	2.979	2.763	1.193	2.801	2.018	1.249
	19	29	3.276	3.037	0.956	3.213	2.943	1.025	2.983	2.780	1.191	2.803	2.034	1.250
	22	29	3.393	3.040	0.957	3.226	2.954	1.026	3.016	2.799	1.192	2.822	2.036	1.250
	16	22	3.237	2.788	0.960	3.170	2.848	1.029	2.967	2.766	1.073	2.776	1.863	1.257
17.2	22	3.248	2.805	0.961	3.181	2.868	1.029	2.980	2.781	1.076	2.785	1.872	1.258	
16	24.4	3.259	2.822	0.961	3.198	2.887	1.029	2.993	2.805	1.078	2.798	1.885	1.258	
17.2	24.4	3.271	2.842	0.961	3.209	2.911	1.029	3.001	2.828	1.079	2.809	1.897	1.258	
22	24.4	3.283	2.859	0.962	3.222	2.921	1.030	3.009	2.854	1.079	2.822	1.905	1.261	
16	27	3.294	2.835	0.963	3.229	2.947	1.030	3.019	2.805	1.085	2.838	1.916	1.262	
19	27	3.303	2.848	0.963	3.247	2.972	1.030	3.040	2.828	1.197	2.877	1.930	1.263	
22	27	3.337	2.869	0.964	3.278	2.990	1.031	3.068	2.854	1.198	2.880	2.000	1.263	
16	29	3.383	3.081	0.965	3.303	3.053	1.033	3.083	2.885	1.198	2.890	2.045	1.264	
19	29	3.393	3.241	0.965	3.334	3.146	1.032	3.095	2.939	1.200	2.907	2.178	1.266	
22	29	3.411	3.252	0.965	3.341	3.149	1.034	3.101	2.955	1.200	2.913	2.175	1.271	
16	22	3.283	2.951	0.968	3.236	2.874	1.041	3.025	2.854	1.206	2.875	1.982	1.279	
17.2	22	3.298	2.962	0.968	3.250	2.884	1.041	3.042	2.872	1.207	2.890	1.996	1.280	
16	24.4	3.315	2.972	0.969	3.268	2.897	1.042	3.055	2.894	1.208	2.912	2.007	1.282	
17.2	24.4	3.352	2.998	0.970	3.283	2.919	1.042	3.071	2.905	1.207	2.934	2.032	1.281	
22	24.4	3.408	3.276	0.971	3.341	3.149	1.043	3.110	2.900	1.209	2.953	2.159	1.289	
16	27	3.475	3.340	0.971	3.393	3.209	1.045	3.146	2.912	1.208	2.978	2.145	1.291	
19	27	3.542	3.412	0.972	3.488	3.311	1.045	3.271	3.053	1.210	3.073	2.254	1.292	
22	27	3.551	3.421	0.974	3.496	3.318	1.047	3.277	3.061	1.212	3.078	2.257	1.293	
16	29	3.553	3.361	0.974	3.498	3.316	1.047	3.279	3.064	1.212	3.080	2.259	1.293	
19	29	3.555	3.365	0.974	3.501	3.317	1.048	3.283	3.147	1.204	3.085	2.215	1.285	
22	29	3.574	3.382	0.977	3.518	3.332	1.052	3.297	3.160	1.209	3.097	2.224	1.290	

Performance Tables (R32 Cool Only Inverter)

RW18AICTG00

Indoor Temperature						Outdoor Temperature								
AFR (CFM)	EWB (°C)	EDB (°C)	TC	35°		TC	40°		TC	46°		TC	52°	
				SC	PI		SC	PI		SC	PI		SC	PI
390	16	22	4.639	3.973	1.507	4.460	3.737	1.611	4.231	3.701	1.897	3.908	2.686	2.005
	17.2	22	4.675	3.939	1.512	4.512	3.787	1.616	4.262	3.763	1.901	3.927	2.706	2.007
	16	24.4	4.688	4.045	1.509	4.530	3.846	1.614	4.297	3.796	1.903	3.966	2.789	2.009
	17.2	24.4	4.704	4.066	1.511	4.612	3.960	1.627	4.346	3.859	1.918	4.084	2.849	2.010
	22	24.4	4.911	4.486	1.515	4.777	4.140	1.628	4.451	4.062	1.919	4.159	2.961	2.011
	16	27	4.993	4.543	1.515	4.863	4.393	1.629	4.563	4.147	1.920	4.193	3.047	2.012
	19	27	5.024	4.626	1.517	4.927	4.491	1.630	4.643	4.310	1.920	4.362	3.222	2.013
	22	27	5.032	4.632	1.520	4.934	4.488	1.631	4.650	4.313	1.926	4.371	3.233	2.014
	16	29	5.038	4.522	1.522	4.938	4.389	1.633	4.653	4.294	1.924	4.376	3.137	2.015
	19	29	5.042	4.563	1.523	4.945	4.423	1.633	4.660	4.321	1.921	4.378	3.163	2.016
	22	29	5.048	4.568	1.525	4.965	4.438	1.634	4.711	4.351	1.922	4.409	3.164	2.017
	16	22	4.982	4.189	1.529	4.879	4.279	1.638	4.635	4.299	1.731	4.337	2.896	2.027
460	17.2	22	4.999	4.214	1.530	4.895	4.309	1.639	4.655	4.323	1.735	4.352	2.910	2.028
	16	24.4	5.015	4.240	1.531	4.922	4.339	1.639	4.675	4.361	1.739	4.371	2.930	2.029
	17.2	24.4	5.034	4.270	1.531	4.938	4.374	1.639	4.689	4.396	1.740	4.389	2.949	2.030
	22	24.4	5.053	4.296	1.533	4.959	4.389	1.640	4.701	4.437	1.741	4.409	2.961	2.034
	16	27	5.069	4.261	1.533	4.970	4.428	1.640	4.716	4.361	1.751	4.433	2.978	2.036
	19	27	5.084	4.280	1.534	4.997	4.466	1.641	4.750	4.396	1.931	4.495	3.001	2.037
	22	27	5.135	4.312	1.535	5.045	4.493	1.643	4.793	4.437	1.932	4.500	3.109	2.038
	16	29	5.206	4.630	1.536	5.083	4.588	1.644	4.816	4.484	1.933	4.515	3.178	2.038
	19	29	5.222	4.870	1.536	5.131	4.727	1.643	4.835	4.568	1.935	4.542	3.386	2.042
	22	29	5.249	4.886	1.537	5.142	4.732	1.646	4.844	4.593	1.936	4.552	3.381	2.049
	16	22	5.053	4.435	1.542	4.981	4.319	1.658	4.727	4.437	1.946	4.491	3.082	2.063
	17.2	22	5.075	4.450	1.542	5.002	4.334	1.659	4.752	4.465	1.946	4.515	3.102	2.065
550	16	24.4	5.102	4.466	1.544	5.029	4.354	1.659	4.773	4.498	1.948	4.549	3.120	2.067
	17.2	24.4	5.158	4.505	1.545	5.053	4.386	1.660	4.797	4.515	1.946	4.584	3.158	2.067
	22	24.4	5.245	4.922	1.546	5.142	4.732	1.661	4.859	4.508	1.950	4.613	3.356	2.079
	16	27	5.347	5.019	1.547	5.222	4.821	1.664	4.916	4.527	1.949	4.652	3.335	2.082
	19	27	5.451	5.127	1.548	5.367	4.976	1.664	5.110	4.745	1.952	4.801	3.503	2.084
	22	27	5.465	5.140	1.552	5.379	4.986	1.668	5.119	4.759	1.955	4.808	3.509	2.085
	16	29	5.467	5.050	1.552	5.384	4.983	1.668	5.123	4.764	1.954	4.811	3.512	2.086
	19	29	5.471	5.056	1.552	5.388	4.984	1.669	5.129	4.892	1.942	4.819	3.443	2.073
	22	29	5.501	5.081	1.556	5.415	5.007	1.675	5.151	4.913	1.950	4.838	3.457	2.080

RW18AIHTG00

Indoor Temperature						Outdoor Temperature								
AFR (CFM)	EWB (°C)	EDB (°C)	TC	35°		TC	40°		TC	46°		TC	52°	
				SC	PI		SC	PI		SC	PI		SC	PI
390	16	22	4.764	4.055	1.499	4.580	3.813	1.603	4.303	3.713	1.870	3.975	2.694	1.977
	17.2	22	4.801	4.020	1.504	4.633	3.865	1.608	4.335	3.775	1.874	3.995	2.715	1.978
	16	24.4	4.814	4.128	1.502	4.652	3.925	1.606	4.371	3.808	1.876	4.034	2.798	1.980
	17.2	24.4	4.831	4.149	1.503	4.736	4.041	1.619	4.421	3.871	1.890	4.154	2.858	1.981
	22	24.4	5.044	4.578	1.507	4.906	4.225	1.620	4.527	4.074	1.891	4.230	2.970	1.982
	16	27	5.128	4.636	1.508	4.994	4.483	1.621	4.641	4.160	1.892	4.264	3.057	1.983
	19	27	5.159	4.721	1.509	5.059	4.583	1.622	4.722	4.323	1.892	4.437	3.232	1.984
	22	27	5.168	4.727	1.512	5.067	4.580	1.623	4.730	4.327	1.899	4.446	3.243	1.985
	16	29	5.174	4.615	1.514	5.071	4.478	1.624	4.733	4.308	1.897	4.451	3.146	1.986
	19	29	5.178	4.657	1.515	5.078	4.514	1.624	4.740	4.335	1.893	4.454	3.172	1.987
	22	29	5.184	4.662	1.517	5.099	4.529	1.626	4.792	4.365	1.895	4.485	3.174	1.988
	16	22	5.117	4.275	1.522	5.010	4.397	1.630	4.714	4.312	1.706	4.412	2.905	1.998
460	17.2	22	5.133	4.301	1.522	5.027	4.397	1.630	4.735	4.336	1.710	4.426	2.919	1.999
	16	24.4	5.150	4.327	1.523	5.054	4.428	1.630	4.756	4.374	1.714	4.446	2.939	2.000
	17.2	24.4	5.170	4.357	1.523	5.071	4.463	1.631	4.769	4.410	1.715	4.464	2.958	2.001
	22	24.4	5.189	4.384	1.525	5.093	4.478	1.632	4.782	4.450	1.716	4.485	2.970	2.005
	16	27	5.206	4.348	1.525	5.104	4.519	1.632	4.797	4.374	1.725	4.510	2.988	2.007
	19	27	5.221	4.368	1.526	5.132	4.557	1.633	4.832	4.410	1.904	4.572	3.010	2.007
	22	27	5.273	4.400	1.527	5.181	4.585	1.634	4.875	4.450	1.904	4.577	3.119	2.008
	16	29	5.346	4.724	1.528	5.220	4.681	1.636	4.899	4.498	1.905	4.592	3.188	2.009
	19	29	5.363	4.970	1.528	5.269	4.823	1.634	4.918	4.582	1.907	4.620	3.397	2.012
	22	29	5.391	4.986	1.530	5.280	4.829	1.638	4.927	4.607	1.908	4.630	3.392	2.020
	16	22	5.189	4.526	1.534	5.115	4.407	1.649	4.808	4.450	1.917	4.568	3.091	2.034
	17.2	22	5.212	4.541	1.534	5.137	4.423	1.650	4.834	4.512	1.918	4.593	3.112	2.035
550	16	24.4	5.240	4.557	1.536	5.165	4.443	1.651	4.854	4.512	1.920	4.627	3.129	2.037
	17.2	24.4	5.297	4.597	1.537	5.189	4.476	1.651	4.879	4.529	1.918	4.663	3.168	2.037
	22	24.4	5.386	5.023	1.538	5.280	4.829	1.653	4.943	4.522	1.922	4.693	3.366	2.049
	16	27	5.492	5.122	1.539	5.363	4.920	1.655	5.000	4.541	1.921	4.732	3.345	2.052
	19	27	5.598	5.232	1.540	5.512	5.078	1.656	5.197	4.760	1.924	4.883	3.514	2.054
	22	27	5.612	5.245	1.544	5.525	5.089	1.660	5.207	4.773	1.927	4.891	3.519	2.055
	16	29	5.615	5.154	1.544	5.529	5.085	1.659	5.210	4.778	1.926	4.894	3.523	2.056
	19	29	5.618	5.160	1.544	5.534	5.086	1.661	5.217	4.907	1.914	4.902	3.454	2.043
	22	29	5.649	5.186	1.548	5.561	5.110	1.666	5.239	4.928	1.921	4.921	3.467	2.050

Performance Tables (R32 Cool Only Inverter)

RW24AICTG00

Indoor Temperature						Outdoor Temperature								
AFR (CFM)	EWB (°C)	EDB (°C)	35°			40°			46°			52°		
			TC	SC	PI	TC	SC	PI	TC	SC	PI	TC	SC	PI
590	16	22	6.111	5.404	2.021	5.876	5.082	2.161	5.367	4.823	2.406	4.957	3.500	2.543
	17.2	22	6.158	5.357	2.027	5.944	5.151	2.167	5.406	4.904	2.411	4.982	3.527	2.545
	16	24.4	6.176	5.502	2.024	5.968	5.231	2.165	5.451	4.947	2.413	5.031	3.635	2.548
	17.2	24.4	6.197	5.530	2.026	6.075	5.386	2.183	5.513	5.029	2.432	5.180	3.713	2.549
	22	24.4	6.470	6.101	2.031	6.293	5.630	2.183	5.645	5.293	2.433	5.275	3.859	2.551
	16	27	6.578	6.178	2.032	6.406	5.975	2.185	5.788	5.405	2.435	5.318	3.971	2.552
	19	27	6.618	6.292	2.034	6.490	6.108	2.186	5.889	5.616	2.435	5.533	4.199	2.553
	22	27	6.629	6.300	2.039	6.500	6.104	2.188	5.898	5.621	2.443	5.544	4.213	2.555
	16	29	6.637	6.150	2.041	6.505	5.969	2.190	5.903	5.596	2.441	5.550	4.088	2.556
	19	29	6.642	6.207	2.043	6.514	6.015	2.190	5.911	5.631	2.436	5.554	4.121	2.557
	22	29	6.650	6.213	2.045	6.540	6.036	2.192	5.976	5.670	2.438	5.593	4.124	2.558
	16	22	6.563	5.697	2.051	6.427	5.820	2.197	5.879	5.602	2.196	5.502	3.774	2.571
690	17.2	22	6.585	5.732	2.052	6.448	5.860	2.198	5.905	5.633	2.201	5.520	3.792	2.573
	16	24.4	6.607	5.767	2.053	6.484	5.901	2.198	5.931	5.683	2.206	5.544	3.819	2.574
	17.2	24.4	6.632	5.807	2.053	6.505	5.948	2.199	5.948	5.729	2.207	5.567	3.843	2.574
	22	24.4	6.657	5.843	2.055	6.533	5.969	2.200	5.963	5.782	2.208	5.593	3.859	2.579
	16	27	6.678	5.795	2.056	6.547	6.023	2.200	5.983	5.683	2.220	5.624	3.881	2.582
	19	27	6.697	5.821	2.057	6.583	6.074	2.201	6.025	5.729	2.450	5.702	3.910	2.583
	22	27	6.765	5.864	2.058	6.646	6.111	2.203	6.080	5.782	2.450	5.708	4.052	2.584
	16	29	6.858	6.297	2.060	6.696	6.239	2.205	6.109	5.844	2.451	5.727	4.142	2.585
	19	29	6.879	6.624	2.060	6.759	6.429	2.203	6.133	5.953	2.454	5.761	4.413	2.589
	22	29	6.915	6.645	2.062	6.774	6.436	2.208	6.145	5.986	2.456	5.774	4.406	2.599
	16	22	6.657	6.032	2.068	6.562	5.874	2.223	5.995	5.782	2.467	5.697	4.016	2.617
	17.2	22	6.686	6.053	2.068	6.590	5.894	2.224	6.028	5.819	2.468	5.728	4.043	2.618
830	16	24.4	6.721	6.073	2.070	6.625	5.921	2.225	6.054	5.862	2.470	5.770	4.065	2.622
	17.2	24.4	6.796	6.127	2.071	6.657	5.966	2.226	6.085	5.884	2.468	5.815	4.116	2.622
	22	24.4	6.910	6.695	2.074	6.774	6.436	2.228	6.164	5.875	2.473	5.852	4.373	2.637
	16	27	7.045	6.827	2.074	6.880	6.557	2.232	6.235	5.899	2.472	5.901	4.346	2.641
	19	27	7.181	6.973	2.076	7.071	6.767	2.232	6.482	6.184	2.475	6.089	4.565	2.643
	22	27	7.199	6.990	2.081	7.087	6.782	2.237	6.493	6.201	2.480	6.099	4.572	2.644
	16	29	7.203	6.868	2.081	7.093	6.778	2.237	6.498	6.208	2.478	6.103	4.577	2.646
	19	29	7.207	6.877	2.081	7.099	6.778	2.239	6.506	6.375	2.463	6.113	4.487	2.629
	22	29	7.247	6.911	2.087	7.133	6.810	2.246	6.534	6.402	2.473	6.137	4.505	2.639

RW24AIHTG00

Indoor Temperature						Outdoor Temperature								
AFR (CFM)	EWB (°C)	EDB (°C)	35°			40°			46°			52°		
			TC	SC	PI	TC	SC	PI	TC	SC	PI	TC	SC	PI
590	16	22	5.737	5.123	1.805	5.516	4.818	1.930	5.029	4.451	2.255	4.645	3.230	2.383
	17.2	22	5.781	5.078	1.810	5.579	4.883	1.936	5.065	4.526	2.260	4.668	3.255	2.385
	16	24.4	5.797	5.215	1.808	5.602	4.959	1.934	5.108	4.565	2.262	4.714	3.354	2.388
	17.2	24.4	5.817	5.242	1.810	5.703	5.105	1.949	5.166	4.641	2.279	4.854	3.427	2.389
	22	24.4	6.074	5.784	1.814	5.907	5.337	1.950	5.290	4.885	2.280	4.943	3.561	2.391
	16	27	6.175	5.856	1.815	6.013	5.664	1.952	5.423	4.987	2.281	4.983	3.665	2.392
	19	27	6.212	5.965	1.817	6.092	5.790	1.952	5.518	5.183	2.281	5.184	3.875	2.392
	22	27	6.223	5.972	1.821	6.102	5.786	1.954	5.527	5.187	2.289	5.195	3.888	2.394
	16	29	6.230	5.830	1.822	6.106	5.658	1.956	5.531	5.164	2.287	5.201	3.772	2.395
	19	29	6.235	5.883	1.824	6.115	5.702	1.956	5.539	5.197	2.282	5.204	3.803	2.396
	22	29	6.242	5.890	1.826	6.140	5.722	1.958	5.599	5.233	2.285	5.241	3.805	2.397
	16	22	6.161	5.400	1.832	6.033	5.517	1.962	5.508	5.170	2.057	5.155	3.482	2.409
17.2	22	6.181	5.433	1.832	6.053	5.555	1.963	5.533	5.199	2.062	5.172	3.499	2.411	
690	16	24.4	6.202	5.466	1.833	6.086	5.594	1.963	5.557	5.244	2.067	5.195	3.524	2.412
	17.2	24.4	6.226	5.505	1.834	6.106	5.639	1.964	5.573	5.287	2.068	5.216	3.546	2.412
	22	24.4	6.249	5.539	1.835	6.133	5.658	1.964	5.587	5.336	2.069	5.241	3.561	2.417
	16	27	6.269	5.493	1.836	6.146	5.709	1.965	5.605	5.244	2.081	5.269	3.582	2.420
	19	27	6.287	5.518	1.837	6.180	5.758	1.966	5.646	5.287	2.295	5.342	3.609	2.420
	22	27	6.350	5.559	1.838	6.239	5.793	1.967	5.697	5.336	2.296	5.348	3.739	2.422
	16	29	6.438	5.969	1.840	6.286	5.915	1.970	5.724	5.393	2.297	5.366	3.822	2.422
	19	29	6.458	6.279	1.840	6.345	6.094	1.968	5.746	5.494	2.300	5.398	4.072	2.426
	22	29	6.492	6.299	1.841	6.359	6.101	1.972	5.757	5.524	2.301	5.410	4.066	2.436
	16	22	6.249	5.718	1.847	6.159	5.568	1.985	5.618	5.336	2.312	5.338	3.706	2.452
	17.2	22	6.276	5.737	1.847	6.186	5.587	1.986	5.648	5.370	2.313	5.367	3.731	2.454
	16	24.4	6.310	5.757	1.849	6.219	5.613	1.988	5.672	5.410	2.315	5.407	3.752	2.457
830	17.2	24.4	6.379	5.808	1.850	6.249	5.655	1.988	5.702	5.430	2.313	5.449	3.798	2.457
	22	24.4	6.486	6.346	1.852	6.359	6.101	1.989	5.776	5.421	2.317	5.483	4.036	2.471
	16	27	6.613	6.471	1.852	6.458	6.216	1.993	5.842	5.444	2.316	5.529	4.011	2.475
	19	27	6.741	6.610	1.854	6.637	6.415	1.993	6.073	5.707	2.320	5.706	4.213	2.476
	22	27	6.758	6.627	1.859	6.653	6.429	1.998	6.084	5.722	2.324	5.715	4.219	2.478
	16	29	6.761	6.511	1.859	6.658	6.425	1.997	6.088	5.729	2.322	5.718	4.224	2.480
	19	29	6.765	6.519	1.858	6.664	6.425	1.999	6.096	5.883	2.308	5.728	4.141	2.463
	22	29	6.803	6.551	1.864	6.696	6.456	2.006	6.122	5.908	2.317	5.750	4.157	2.473

Performance Tables (R32 Cool Only Inverter)

RW30AICTG00

Indoor Temperature						Outdoor Temperature								
AFR (CFM)	EWB (°C)	EDB (°C)	35°			40°			46°			52°		
			TC	SC	PI	TC	SC	PI	TC	SC	PI	TC	SC	PI
660	16	22	7.482	6.498	2.355	7.194	6.111	2.518	6.165	5.315	2.707	5.695	3.857	2.862
	17.2	22	7.540	6.441	2.362	7.277	6.193	2.525	6.211	5.404	2.713	5.723	3.887	2.864
	16	24.4	7.561	6.615	2.359	7.306	6.290	2.523	6.262	5.451	2.715	5.779	4.005	2.867
	17.2	24.4	7.587	6.649	2.361	7.438	6.476	2.543	6.334	5.542	2.736	5.951	4.092	2.868
	22	24.4	7.922	7.336	2.367	7.705	6.770	2.544	6.485	5.833	2.738	6.060	4.252	2.870
	16	27	8.053	7.428	2.368	7.843	7.185	2.546	6.649	5.956	2.739	6.109	4.376	2.871
	19	27	8.103	7.565	2.371	7.946	7.344	2.547	6.765	6.189	2.739	6.356	4.627	2.872
	22	27	8.117	7.575	2.375	7.958	7.339	2.549	6.776	6.194	2.749	6.369	4.643	2.874
	16	29	8.126	7.395	2.378	7.964	7.176	2.552	6.781	6.167	2.746	6.376	4.505	2.875
	19	29	8.132	7.462	2.380	7.975	7.233	2.552	6.791	6.206	2.740	6.380	4.541	2.876
	22	29	8.141	7.470	2.383	8.008	7.258	2.554	6.865	6.249	2.743	6.425	4.544	2.878
	16	22	8.036	6.850	2.390	7.869	6.997	2.560	6.753	6.174	2.470	6.320	4.158	2.893
780	17.2	22	8.062	6.892	2.391	7.895	7.046	2.561	6.783	6.208	2.476	6.341	4.178	2.894
	16	24.4	8.089	6.934	2.392	7.938	7.095	2.561	6.813	6.262	2.482	6.369	4.208	2.896
	17.2	24.4	8.120	6.982	2.392	7.964	7.152	2.562	6.832	6.313	2.483	6.395	4.235	2.896
	22	24.4	8.150	7.026	2.395	7.999	7.176	2.563	6.850	6.371	2.484	6.425	4.252	2.902
	16	27	8.177	6.967	2.395	8.016	7.241	2.564	6.873	6.262	2.498	6.461	4.277	2.905
	19	27	8.199	6.999	2.397	8.060	7.303	2.565	6.922	6.313	2.756	6.550	4.309	2.906
	22	27	8.282	7.051	2.398	8.137	7.347	2.567	6.984	6.371	2.757	6.557	4.465	2.908
	16	29	8.396	7.571	2.401	8.198	7.502	2.570	7.018	6.439	2.758	6.579	4.564	2.908
	19	29	8.422	7.964	2.401	8.275	7.729	2.567	7.045	6.560	2.761	6.619	4.863	2.913
	22	29	8.467	7.990	2.403	8.293	7.738	2.572	7.059	6.596	2.763	6.633	4.856	2.924
	16	22	8.150	7.252	2.409	8.034	7.062	2.591	6.888	6.371	2.776	6.545	4.425	2.944
	17.2	22	8.185	7.277	2.410	8.068	7.087	2.592	6.925	6.412	2.777	6.580	4.455	2.946
940	16	24.4	8.229	7.302	2.412	8.111	7.119	2.593	6.955	6.460	2.779	6.629	4.480	2.950
	17.2	24.4	8.320	7.367	2.414	8.150	7.173	2.594	6.990	6.484	2.777	6.680	4.535	2.949
	22	24.4	8.460	8.049	2.417	8.293	7.738	2.596	7.081	6.474	2.782	6.723	4.819	2.967
	16	27	8.625	8.208	2.417	8.423	7.884	2.600	7.163	6.501	2.781	6.779	4.789	2.971
	19	27	8.792	8.384	2.419	8.657	8.136	2.601	7.446	6.814	2.785	6.996	5.031	2.973
	22	27	8.814	8.405	2.425	8.677	8.154	2.607	7.459	6.833	2.790	7.006	5.038	2.975
	16	29	8.818	8.258	2.425	8.684	8.149	2.606	7.465	6.841	2.788	7.011	5.044	2.977
	19	29	8.824	8.268	2.425	8.691	8.150	2.609	7.474	7.025	2.771	7.022	4.945	2.958
	22	29	8.872	8.310	2.432	8.734	8.188	2.617	7.506	7.055	2.782	7.050	4.964	2.969

RW30AIHTG00

Indoor Temperature						Outdoor Temperature								
AFR (CFM)	EWB (°C)	EDB (°C)	35°			40°			46°			52°		
			TC	SC	PI	TC	SC	PI	TC	SC	PI	TC	SC	PI
640	16	22	7.482	6.472	2.355	7.194	6.086	2.518	6.286	5.483	2.818	5.806	3.979	2.979
	17.2	22	7.540	6.416	2.362	7.277	6.169	2.525	6.332	5.575	2.825	5.835	4.009	2.981
	16	24.4	7.561	6.589	2.359	7.306	6.265	2.523	6.384	5.624	2.827	5.892	4.132	2.984
	17.2	24.4	7.587	6.623	2.361	7.438	6.450	2.543	6.457	5.717	2.849	6.067	4.221	2.986
	22	24.4	7.922	7.307	2.367	7.705	6.743	2.544	6.612	6.017	2.850	6.179	4.387	2.988
	16	27	8.053	7.399	2.368	7.843	7.156	2.546	6.779	6.144	2.852	6.229	4.514	2.989
	19	27	8.103	7.536	2.371	7.946	7.315	2.547	6.898	6.384	2.852	6.480	4.774	2.991
	22	27	8.117	7.545	2.375	7.958	7.310	2.549	6.908	6.390	2.862	6.494	4.790	2.992
	16	29	8.126	7.366	2.378	7.964	7.148	2.552	6.913	6.362	2.859	6.501	4.647	2.994
	19	29	8.132	7.433	2.380	7.975	7.204	2.552	6.923	6.402	2.853	6.505	4.685	2.995
	22	29	8.141	7.441	2.383	8.008	7.229	2.554	6.999	6.446	2.856	6.551	4.688	2.996
	16	22	8.036	6.823	2.390	7.869	6.970	2.560	6.885	6.369	2.572	6.444	4.290	3.012
770	17.2	22	8.062	6.865	2.391	7.895	7.018	2.561	6.916	6.404	2.578	6.465	4.310	3.013
	16	24.4	8.089	6.906	2.392	7.938	7.067	2.561	6.946	6.460	2.584	6.494	4.341	3.015
	17.2	24.4	8.120	6.955	2.392	7.964	7.124	2.562	6.966	6.513	2.585	6.520	4.369	3.016
	22	24.4	8.150	6.998	2.395	7.999	7.148	2.563	6.984	6.573	2.586	6.551	4.387	3.021
	16	27	8.177	6.940	2.395	8.016	7.213	2.564	7.007	6.460	2.601	6.587	4.412	3.024
	19	27	8.199	6.972	2.397	8.060	7.274	2.565	7.057	6.513	2.869	6.678	4.445	3.025
	22	27	8.282	7.023	2.398	8.137	7.318	2.567	7.121	6.573	2.870	6.686	4.606	3.027
	16	29	8.396	7.541	2.401	8.198	7.472	2.570	7.155	6.643	2.871	6.708	4.708	3.028
	19	29	8.422	7.933	2.401	8.275	7.699	2.567	7.183	6.767	2.875	6.748	5.017	3.033
	22	29	8.467	7.959	2.403	8.293	7.707	2.572	7.197	6.805	2.876	6.762	5.009	3.045
	16	22	8.150	7.224	2.409	8.034	7.035	2.591	7.022	6.573	2.890	6.673	4.565	3.065
	17.2	22	8.185	7.249	2.410	8.068	7.059	2.592	7.060	6.615	2.891	6.708	4.596	3.067
920	16	24.4	8.229	7.274	2.412	8.111	7.091	2.593	7.090	6.664	2.894	6.759	4.621	3.071
	17.2	24.4	8.320	7.338	2.414	8.150	7.145	2.594	7.127	6.689	2.891	6.811	4.679	3.071
	22	24.4	8.460	8.018	2.417	8.293	7.707	2.596	7.219	6.678	2.897	6.854	4.972	3.089
	16	27	8.625	8.176	2.417	8.423	7.853	2.600	7.303	6.706	2.896	6.911	4.941	3.093
	19	27	8.792	8.351	2.419	8.657	8.104	2.601	7.591	7.030	2.899	7.132	5.190	3.095
	22	27	8.814	8.372	2.425	8.677	8.122	2.607	7.605	7.049	2.905	7.143	5.198	3.097
	16	29	8.818	8.226	2.425	8.684	8.117	2.606	7.610	7.057	2.903	7.148	5.203	3.099
	19	29	8.824	8.236	2.425	8.691	8.118	2.609	7.620	7.247	2.885	7.159	5.101	3.079
	22	29	8.872	8.277	2.432	8.734	8.156	2.617	7.653	7.277	2.896	7.188	5.121	3.091

Performance Tables (R32 Cool Only Inverter)


RW36AICTG00

Indoor Temperature						Outdoor Temperature								
AFR (CFM)	EWB (°C)	EDB (°C)	35°			40°			46°			52°		
			TC	SC	PI	TC	SC	PI	TC	SC	PI	TC	SC	PI
770	16	22	8.979	7.770	2.826	8.633	7.307	3.021	7.737	6.733	3.469	7.147	4.886	3.667
	17.2	22	9.048	7.703	2.835	8.733	7.406	3.031	7.793	6.846	3.477	7.182	4.923	3.670
	16	24.4	9.074	7.911	2.830	8.768	7.521	3.028	7.858	6.906	3.480	7.252	5.074	3.673
	17.2	24.4	9.104	7.951	2.833	8.926	7.744	3.052	7.948	7.021	3.507	7.468	5.183	3.676
	22	24.4	9.506	8.773	2.840	9.246	8.095	3.053	8.138	7.389	3.508	7.605	5.387	3.678
	16	27	9.665	8.883	2.842	9.412	8.592	3.056	8.344	7.544	3.510	7.667	5.543	3.679
	19	27	9.724	9.047	2.845	9.536	8.782	3.057	8.490	7.840	3.510	7.976	5.862	3.681
	22	27	9.741	9.058	2.851	9.550	8.776	3.060	8.503	7.847	3.522	7.993	5.882	3.683
	16	29	9.751	8.843	2.854	9.558	8.582	3.062	8.509	7.812	3.519	8.001	5.706	3.685
	19	29	9.759	8.924	2.857	9.571	8.649	3.062	8.522	7.861	3.512	8.007	5.753	3.686
	22	29	9.770	8.933	2.859	9.610	8.679	3.065	8.615	7.916	3.515	8.063	5.756	3.688
	16	22	9.644	8.191	2.868	9.443	8.368	3.073	8.475	7.821	3.166	7.931	5.268	3.707
900	17.2	22	9.675	8.241	2.869	9.475	8.426	3.073	8.512	7.864	3.173	7.957	5.293	3.709
	16	24.4	9.707	8.292	2.870	9.527	8.485	3.074	8.550	7.933	3.181	7.993	5.330	3.711
	17.2	24.4	9.745	8.350	2.871	9.558	8.553	3.075	8.574	7.998	3.182	8.025	5.365	3.712
	22	24.4	9.781	8.402	2.874	9.599	8.582	3.076	8.596	8.071	3.183	8.063	5.387	3.719
	16	27	9.812	8.332	2.875	9.620	8.660	3.076	8.624	7.933	3.201	8.107	5.418	3.723
	19	27	9.840	8.370	2.877	9.672	8.733	3.078	8.686	7.998	3.532	8.219	5.459	3.724
	22	27	9.939	8.432	2.878	9.765	8.786	3.080	8.764	8.071	3.533	8.229	5.656	3.726
	16	29	10.076	9.053	2.881	9.838	8.971	3.084	8.807	8.157	3.534	8.256	5.781	3.727
	19	29	10.107	9.524	2.881	9.931	9.243	3.081	8.841	8.310	3.538	8.305	6.160	3.733
	22	29	10.161	9.555	2.883	9.952	9.253	3.087	8.858	8.356	3.540	8.323	6.151	3.747
	16	22	9.781	8.672	2.891	9.641	8.446	3.109	8.643	8.071	3.557	8.213	5.606	3.773
	17.2	22	9.823	8.703	2.892	9.682	8.475	3.110	8.690	8.123	3.559	8.257	5.644	3.775
1030	16	24.4	9.876	8.733	2.895	9.734	8.514	3.111	8.727	8.183	3.562	8.319	5.675	3.780
	17.2	24.4	9.985	8.810	2.897	9.781	8.578	3.112	8.772	8.214	3.559	8.383	5.745	3.780
	22	24.4	10.152	9.626	2.900	9.952	9.253	3.115	8.886	8.200	3.565	8.436	6.105	3.802
	16	27	10.351	9.815	2.900	10.108	9.428	3.120	8.989	8.235	3.564	8.506	6.067	3.807
	19	27	10.551	10.026	2.903	10.389	9.730	3.121	9.344	8.632	3.569	8.779	6.373	3.810
	22	27	10.577	10.051	2.910	10.413	9.751	3.128	9.361	8.656	3.575	8.792	6.382	3.812
	16	29	10.583	9.876	2.910	10.421	9.745	3.128	9.367	8.666	3.573	8.798	6.389	3.815
	19	29	10.589	9.887	2.910	10.430	9.746	3.131	9.379	8.899	3.551	8.812	6.264	3.790
	22	29	10.647	9.937	2.918	10.481	9.792	3.141	9.419	8.936	3.565	8.847	6.288	3.804


RW36AIHTG00

Indoor Temperature						Outdoor Temperature								
AFR (CFM)	EWB (°C)	EDB (°C)	35°			40°			46°			52°		
			TC	SC	PI	TC	SC	PI	TC	SC	PI	TC	SC	PI
770	16	22	9.104	7.937	2.865	8.753	7.464	3.063	7.833	6.794	3.478	7.236	4.930	3.676
	17.2	22	9.174	7.868	2.874	8.854	7.565	3.072	7.891	6.907	3.485	7.271	4.968	3.679
	16	24.4	9.200	8.080	2.869	8.890	7.683	3.069	7.956	6.968	3.488	7.343	5.119	3.683
	17.2	24.4	9.231	8.122	2.872	9.051	7.910	3.094	8.047	7.084	3.516	7.561	5.230	3.685
	22	24.4	9.639	8.961	2.879	9.375	8.269	3.095	8.240	7.455	3.517	7.700	5.435	3.687
	16	27	9.799	9.074	2.881	9.543	8.776	3.098	8.448	7.612	3.519	7.762	5.593	3.689
	19	27	9.859	9.241	2.884	9.669	8.971	3.099	8.596	7.910	3.519	8.076	5.915	3.690
	22	27	9.876	9.253	2.890	9.683	8.965	3.102	8.609	7.917	3.531	8.092	5.935	3.693
	16	29	9.887	9.033	2.893	9.691	8.766	3.104	8.615	7.882	3.528	8.101	5.758	3.694
	19	29	9.895	9.115	2.896	9.704	8.835	3.104	8.628	7.932	3.521	8.106	5.805	3.695
	22	29	9.906	9.125	2.899	9.744	8.865	3.107	8.722	7.987	3.524	8.164	5.808	3.697
	16	22	9.778	8.367	2.908	9.575	8.547	3.115	8.581	7.891	3.174	8.030	5.315	3.716
17.2	22	9.810	8.418	2.909	9.607	8.607	3.115	8.618	7.934	3.181	8.057	5.340	3.718	
900	16	24.4	9.842	8.469	2.910	9.659	8.667	3.116	8.656	8.004	3.189	8.092	5.378	3.720
	17.2	24.4	9.881	8.529	2.911	9.691	8.736	3.117	8.681	8.069	3.190	8.126	5.413	3.721
	22	24.4	9.917	8.582	2.914	9.733	8.766	3.118	8.704	8.144	3.191	8.164	5.435	3.728
	16	27	9.949	8.510	2.914	9.754	8.845	3.119	8.732	8.004	3.209	8.208	5.467	3.732
	19	27	9.977	8.549	2.917	9.807	8.921	3.120	8.794	8.069	3.541	8.322	5.508	3.733
	22	27	10.078	8.613	2.918	9.902	8.975	3.123	8.874	8.144	3.542	8.331	5.707	3.736
	16	29	10.217	9.248	2.921	9.975	9.163	3.126	8.916	8.231	3.543	8.359	5.833	3.736
	19	29	10.248	9.728	2.921	10.069	9.441	3.123	8.951	8.385	3.547	8.409	6.216	3.742
	22	29	10.302	9.760	2.923	10.091	9.452	3.130	8.968	8.431	3.549	8.427	6.206	3.757
	16	22	9.917	8.858	2.931	9.775	8.627	3.152	8.751	8.144	3.566	8.315	5.656	3.783
	17.2	22	9.960	8.889	2.932	9.817	8.657	3.153	8.798	8.196	3.568	8.360	5.694	3.785
	16	24.4	10.013	8.920	2.935	9.870	8.696	3.154	8.836	8.257	3.571	8.422	5.726	3.790
1030	17.2	24.4	10.124	8.999	2.936	9.917	8.762	3.155	8.881	8.288	3.568	8.488	5.797	3.789
	22	24.4	10.294	9.832	2.940	10.091	9.452	3.158	8.997	8.274	3.574	8.541	6.160	3.812
	16	27	10.495	10.026	2.940	10.249	9.631	3.163	9.101	8.309	3.573	8.613	6.121	3.817
	19	27	10.698	10.241	2.943	10.534	9.939	3.164	9.460	8.710	3.578	8.888	6.430	3.819
	22	27	10.725	10.267	2.951	10.558	9.960	3.171	9.477	8.734	3.584	8.902	6.440	3.822
	16	29	10.730	10.087	2.950	10.566	9.954	3.171	9.484	8.744	3.582	8.908	6.447	3.825
	19	29	10.737	10.100	2.950	10.575	9.955	3.174	9.496	8.979	3.560	8.922	6.320	3.800
	22	29	10.796	10.150	2.958	10.627	10.002	3.184	9.537	9.017	3.574	8.958	6.345	3.814


Wiring Diagrams.

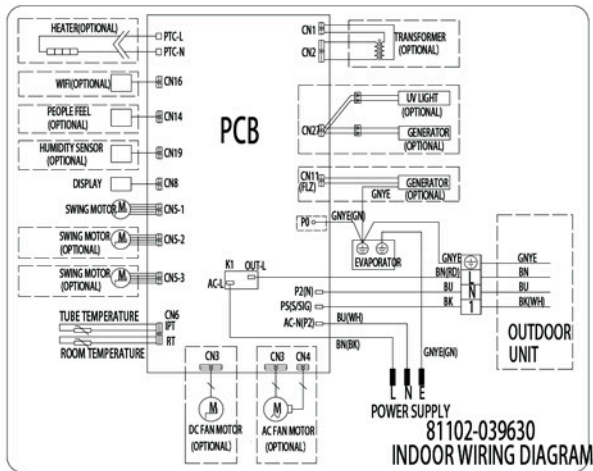

RINW12AICTG00
RINW12AIHTG00
RINW18AICTG00
RINW18AIHTG00

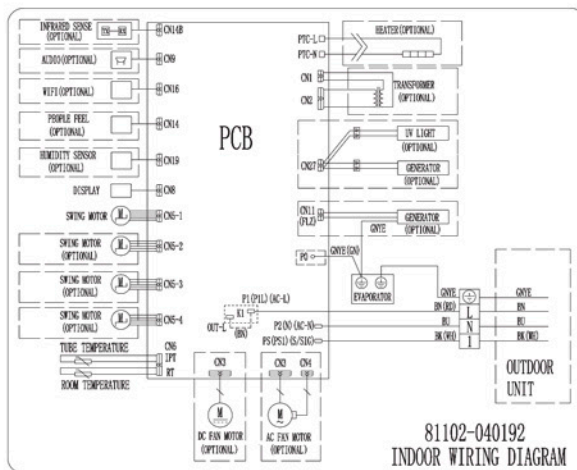


RINW24AICTG00

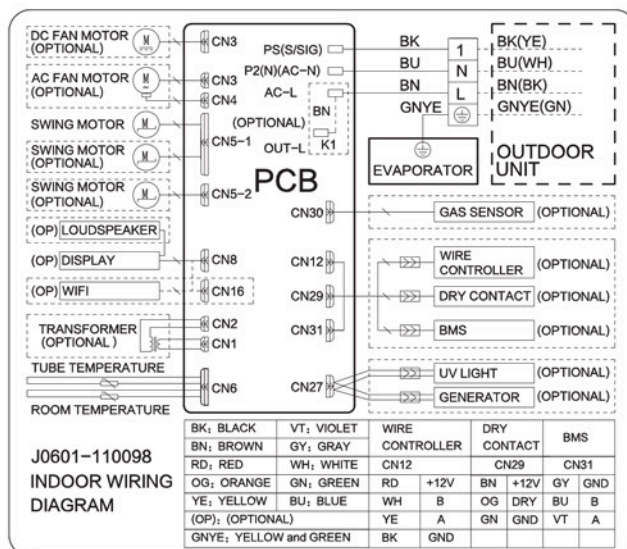


RINW24AIHTG00
RINW30AICTG00
RINW30AIHTG00
RINW36AICTG00
RINW36AIHTG00

Wiring Diagrams.

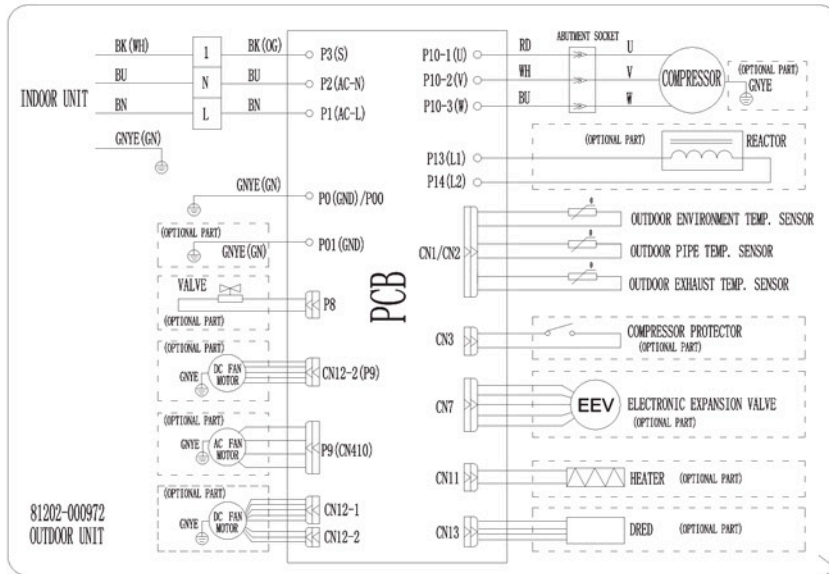

RONW12AICTG00
RONW12AIHTG00

RONW18AICTG00
RONW18AIHTG00

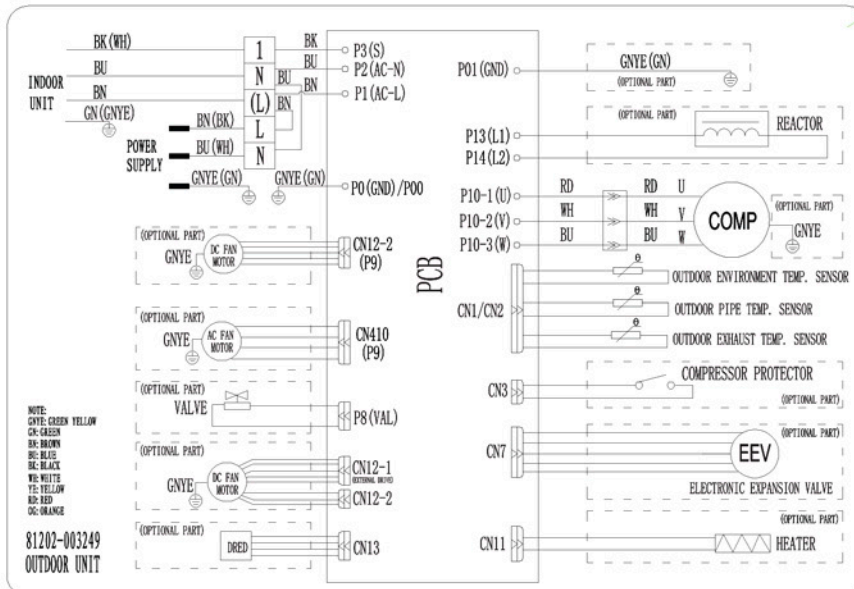

RONW24AICTG00
RONW24AIHTG00
RONW30AICTG00

RONW30AIHTG00
RONW36AICTG00
RONW36AIHTG00





engineered for life™



@rheemmea



www.rheem-mea.com



Rheem Middle East

UAE: RMEA Manufacturing LLC | Onyx 2, Level P3, Offices 301-304, The Greens Dubai, UAE | Tel: +971 4 230 5100
KSA: Rheem Innovation and Learning Centre | Riyadh Building 14, Business District, Airport Road, Riyadh, KSA | Tel: +966 11 494 5222

R32 Wall Mount Inverter Catalogue 2026