

The new degree of comfort.®

# Vertical and horizontal point-of-use water heaters with shorter heating time and factory installed heavy duty mounting brackets

#### **Features**

- Tanks with Glasslined steel for longer durability.
- Durable copper heating element easy for replacement
- An integral over-temperature safety device and a childproof automatic thermostat are featured on all models
- Degree Of Protection IPX4 for horizontal water heaters, IP 24 for Vertical water heaters
- Space saving design for installation in limited spaces
- Installed easily in replacement and new construction applications
- Factory installed heavy duty wall mounting brackets) included
- Proprietary Class 1 Polyurethane Foam insulation process for superior heat retention
- All water connections are 1/2"NPT

#### **Long Life**

 Magnesium anode rod that ensures long tank life



### Point-of-Use

30, 50, 80 & 100-Liter Capacities 220/240 Volt AC/ Single Phase 50 Hz 2-Wire Single Phase Electric







MOIAT certification IEC Compliance G Mark Certification ROHS Certification


In keeping with its policy of continuous progress and product improvement, Rheem reserves the right to make changes without notice.



The new degree of comfort®

## **VERTICAL TYPE - WALL MOUNTED**

RH-FRX-030-VF

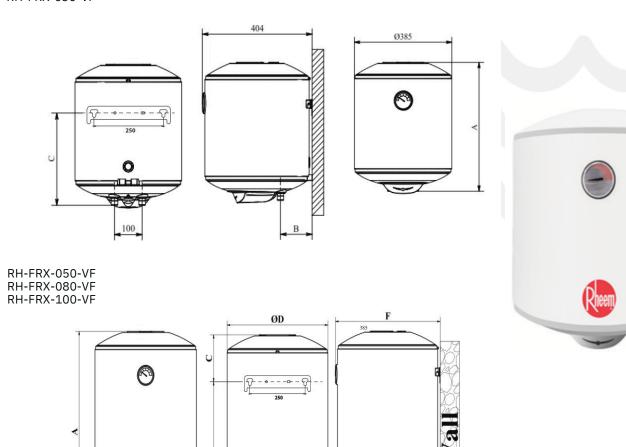

MODEL	STORAGE CAPACITY		VOLTAGE		PACKING	SHIPPING WEIGHT		HEIGHT (A)	(B)	(C)	DIA D	E	F
	LIT	GAL	(V)	POWER (KW)	DIMENSION (MM)	LBS	KG	(MM)	(MM)	(MM)	(MM)	(MM)	(MM)
RH-FRX-030-VF	30	8	220-240	1.2, 1.5	490*465*440	26	13.5	490	117	354	385	-	404
RH-FRX-050-VF	50	13	220-240	1.2, 1.5, 2.0	490*468*660	33	17	540	386	171	442	145	453
RH-FRX-080-VF	80	21	220-240	1.2, 1.5, 2.0	490*465*815	44	23	725	609	171	442	145	453
RH-FRX-100-VF	100	26	220-240	1.2, 1.5, 2.0	490*465*960	55	26	865	769	171	442	145	453

In keeping with its policy of continuous progress and product improvement, Rheem reserves the right to make changes without notice.

100


B



RH-FMG-050-HF

RH-FMG-080-HF

RH-FMG-100-HF

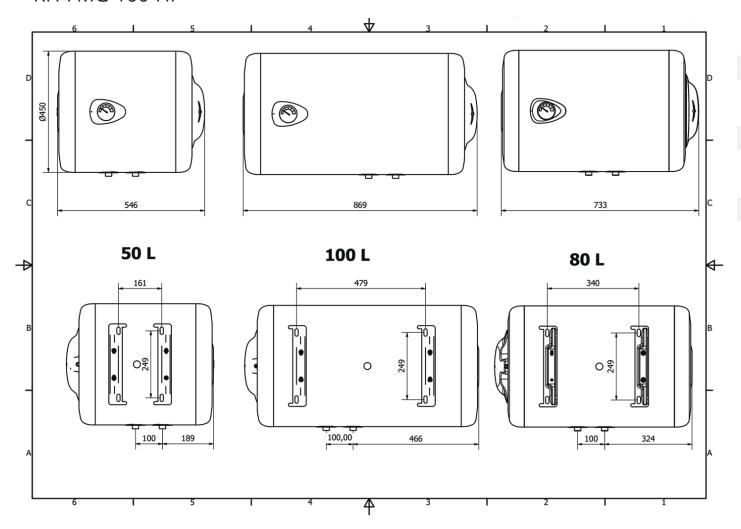

MODEL	STORAGE CAPACITY		VOLTAGE	POWER (KW)	PACKING	SHIPPING	WEIGHT	HEIGHT (A)	DIA
	LIT	GAL	(V)	POWER (KW)	DIMENSION (MM)	LBS	KG	(MM)	(MM)
RH-FMG-050-HF	50	13	220-240	1.2, 1.5	490*468*660	33	17	556	442
RH-FMG-080-HF	80	21	220-240	1.2, 1.5, 2.0	490*465*815	44	23	780	442
RH-FMG-100-HF	100	26	220-240	1.2, 1.5, 2.0	490*465*960	55	26	940	442

In keeping with its policy of continuous progress and product improvement, Rheem reserves the right to make changes without notice.